
HD31805
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class A/AB linear GaN design
Instantaneous ultra-wide bandwidth
High power covering the full S and C bands
Suitable for all Single channel modulation standards
Small form factor & light weight
Built-in protection circuits
High reliability and ruggedness

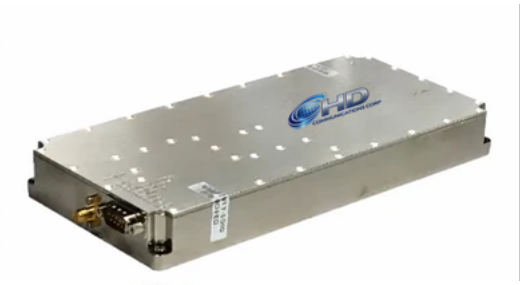

ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	2.0 - 8.0 GHz	
Power Output @ Psat	40 Watt Min	CW
Power Output @ P1dB GCP	30 Watt Min / 40 Watt Typ	Biased class A
Power Gain	46 dB Min	
Power Gain Flatness	4.0 dB p-p Max	Constant input power
Input / Output Return Loss	-10 dB Max	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-30 dBc Typ	36dBm/Tone, Δ = 1 MHz
Harmonics	-15 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Noise Figure	8.0 dB Max	
Operating Voltage	32 VDC Nom	
Current Consumption	13 Amp Max	At rated Pout
Input Power Protection	+5 dBm Max	<10 Sec without damage
Load VSWR Protection	5 : 1 Max	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +65 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	250 x 110 x 25 mm	Excluding connectors
Weight	1.4 Kg.	
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	7-Pin Hybrid D-Sub	
Cooling	External Heatsink	Forced air required


D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	FWD	Reserved
2	VVA	Reserved
3	CURRENT SENSOR	I_D@50mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	Enable = TTL "High" or OPEN / Disable = TTL "Low" or GND
A1	VDD	32VDC
A2	GND	Ground

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD31805
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

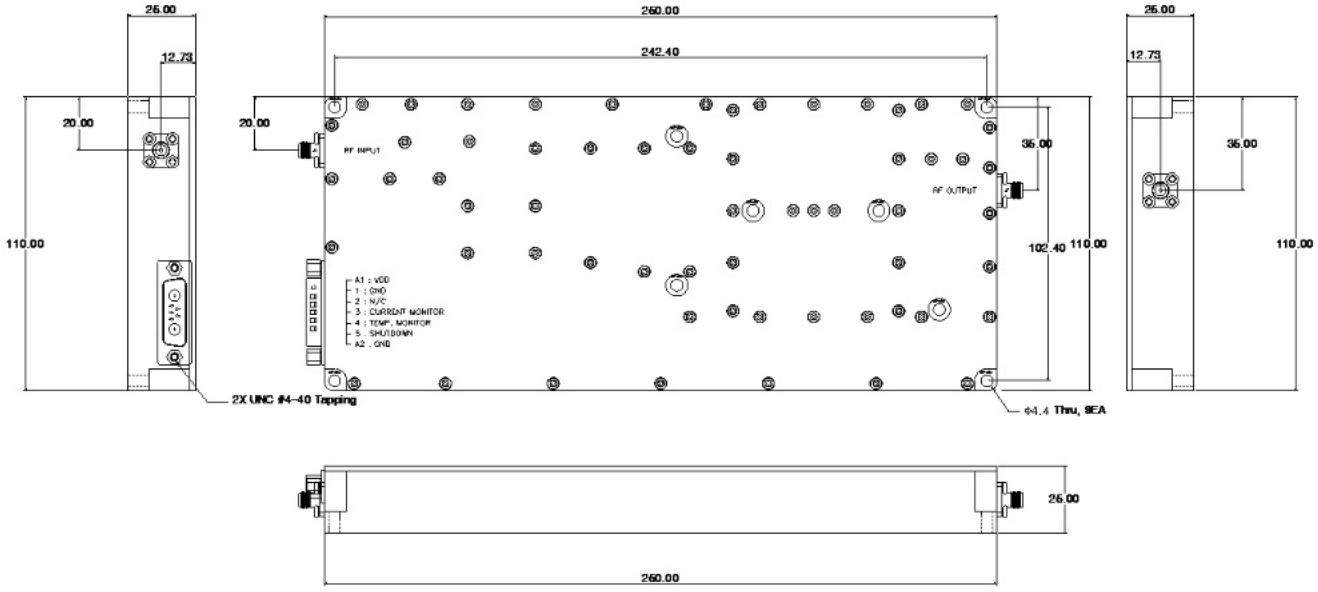

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com

Specifications subject to change without notice. Specifications and drawings may vary with selected options.