HD30147
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear GaN design
Instantaneous wide bandwidth
Suitable for all modulations standards
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	1000 - 2000 MHz	
Power Output @ Psat	35 Watt Min	CW
Output Power @ P1dB	25 Watt Min	CW
Power Gain	45 dB Min	0dBm or less for rated Pout
Power Gain Flatness	2.0 dB p-p Max	Constant input power
Input Return Loss	-10 dB Max	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-30 dBc Typ	35dBm/Tone, Δ = 1MHz
Harmonics	-20 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	28 VDC Nom	
Current Consumption	5 Amp Max	At rated Pout
Input Power Protection	+8 dBm Max	<10 Sec without damage
Load VSWR Protection	∞ : 1	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +75 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non Condensation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	146.4 x 69 x 27 mm	Excluding Connectors
Weight	550 gr.	
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required


D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	N/C	N/C
2	N/C	N/C
3	CURRENT SENSOR	I_D@50mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	Enable = TTL High or Open; Disable = TTL Low or Short
6, 7	VDD	28VDC
8, 9	GND	Ground

38 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to chan e without notice. Specifications and drawings may vary with selected options.

HD30147
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

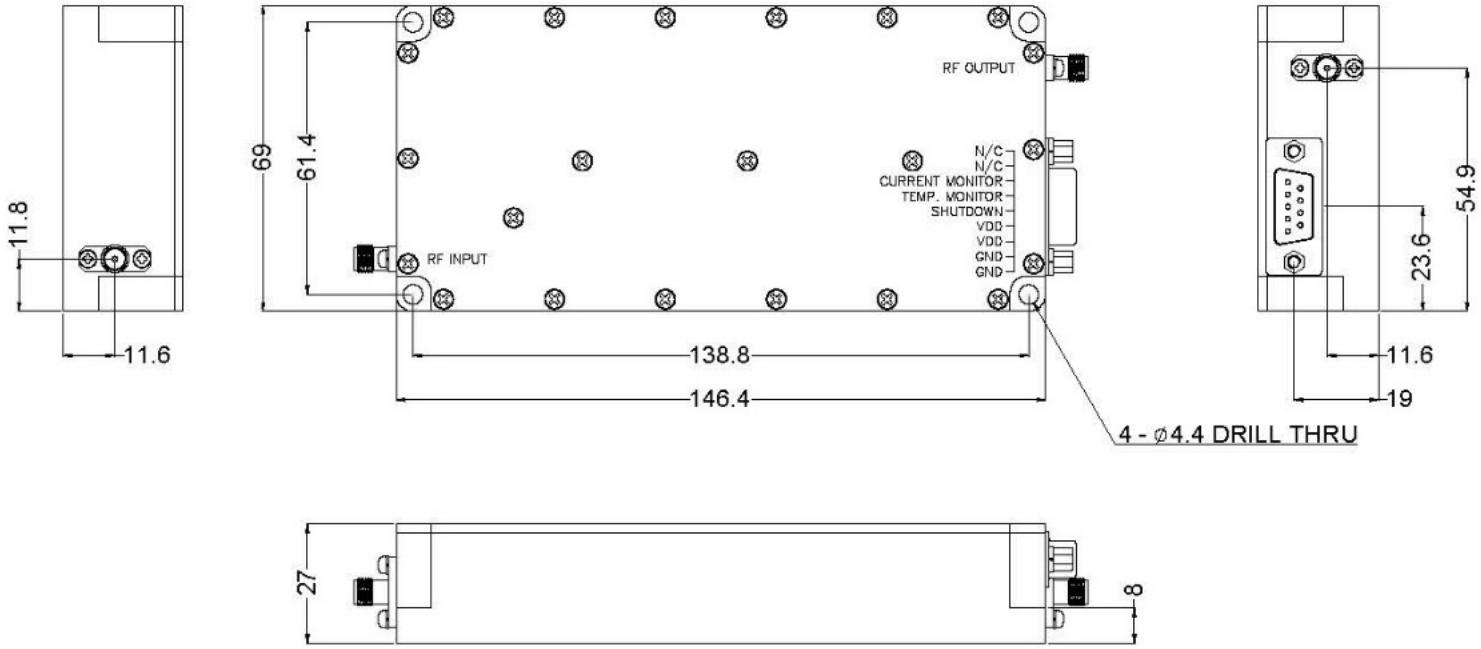

38 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com

Specifications subject to change without notice. Specifications and drawings may vary with selected options.