HD30405
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear GaN design
Instantaneous wide bandwidth
Suitable for all single channel modulation standards
Small form factor and light weight
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS : @ 25°C, 28VDC

Parameter	Specification	Notes
Operating Frequency Range	2.0 - 6.0 GHz	
Power Output @ Psat	10 Watt Min / 15 Watt Typ	CW
Power Output @ P1dB	8 Watt Typ	CW
Power Gain	42 dB Min	0dBm or less for rated Pout
Power Gain Flatness	3.0 dB p-p Max	Constant input power
Input Return Loss	-10 dB Max	
2-Tone Intermodulation (IMD)	-30 dBc Typ	30dBm/Tone, Δ = 1MHz
Harmonics 2^{nd} / 3^{rd}	<-15 dBc / -20 dBc Typ	At Rated Pout
Spurious	-60 dBc Max	Non-harmonics
Noise Figure	10 dB Max	
Operating Voltage	28 - 30 VDC	
Current Consumption	3.4 Amp Typ	At rated Pout
Input Power Protection	+8 dBm Max	<10 Sec without damage
Load VSWR Protection	∞ : 1	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +75 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	156.4 x 69 x 27 mm	Excluding connectors
Weight	570 gr.	
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required

D-SUB CONNECTOR PIN ASSIGNMENT


Pin	Function	Description
1	FWD	OPTION 101
2	REV	OPTION 102
3	CURRENT SENSOR	I_D@100mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	Enable = TTL High or Open; Disable = TTL Low or Short
6, 7	VDD	28VDC
8, 9	GND	Ground

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.

HD30405
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING
STD or with OPTION 101 & OPTION 102

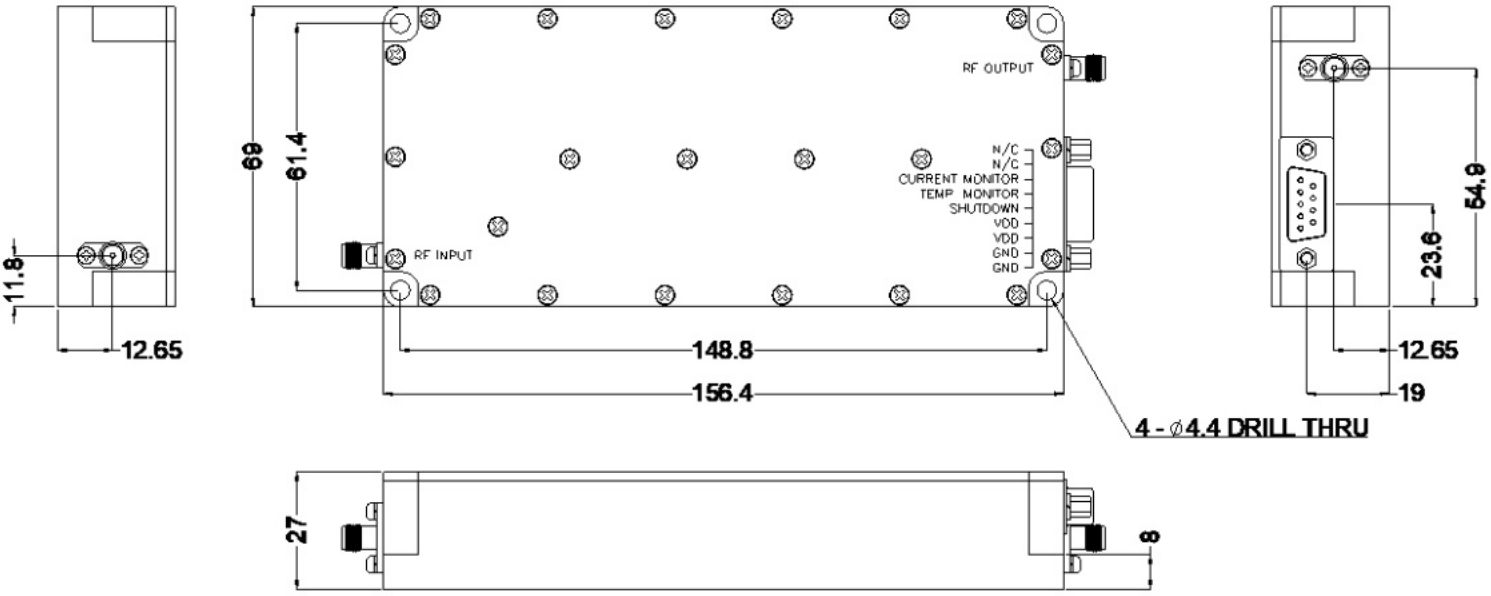

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com
Specifications subject to change without notice.
Specifications and drawings may vary with selected options.