
HD30851
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear GaAs hybrid design
Instantaneous wide bandwidth
Suitable for all modulations standards
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	18.0 - 26.5 GHz	
Power Output	10 Watt Min	CW
Power Gain	40 dB Min	
Power Gain Flatness	4.0 dB p-p Max	Constant input power
Input / Output Return Loss	10 dB Min	Relative to 50 Ohm
Harmonics	>20 dBc Typ	At rated Pout
Non Harmonics Spurious	>60 dBc Min	
Operating Voltage	9.0 ± 0.1 VDC Nom	
Current Consumption	20.0 Amp Max	At rated Pout
Max Input Power	+5 dBm	Without damage
Load VSWR Protection	5 : 1	

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +55 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	170 X 180 X 27 mm	Excluding connectors
Weight	1.5 Kg	
RF Connectors In/Out	2.92mm(K) / 2.92mm(K)	
DC Power / Interface Connector	7-Pin Hybrid D-Sub	
Cooling	External Heatsink	Forced air required


D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	N/C	Reserved
2	N/C	Reserved
3	CURRENT SENSOR	I_D@20mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	TTL
A1	VDD	9VDC
A2	GND	Ground

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD30851
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

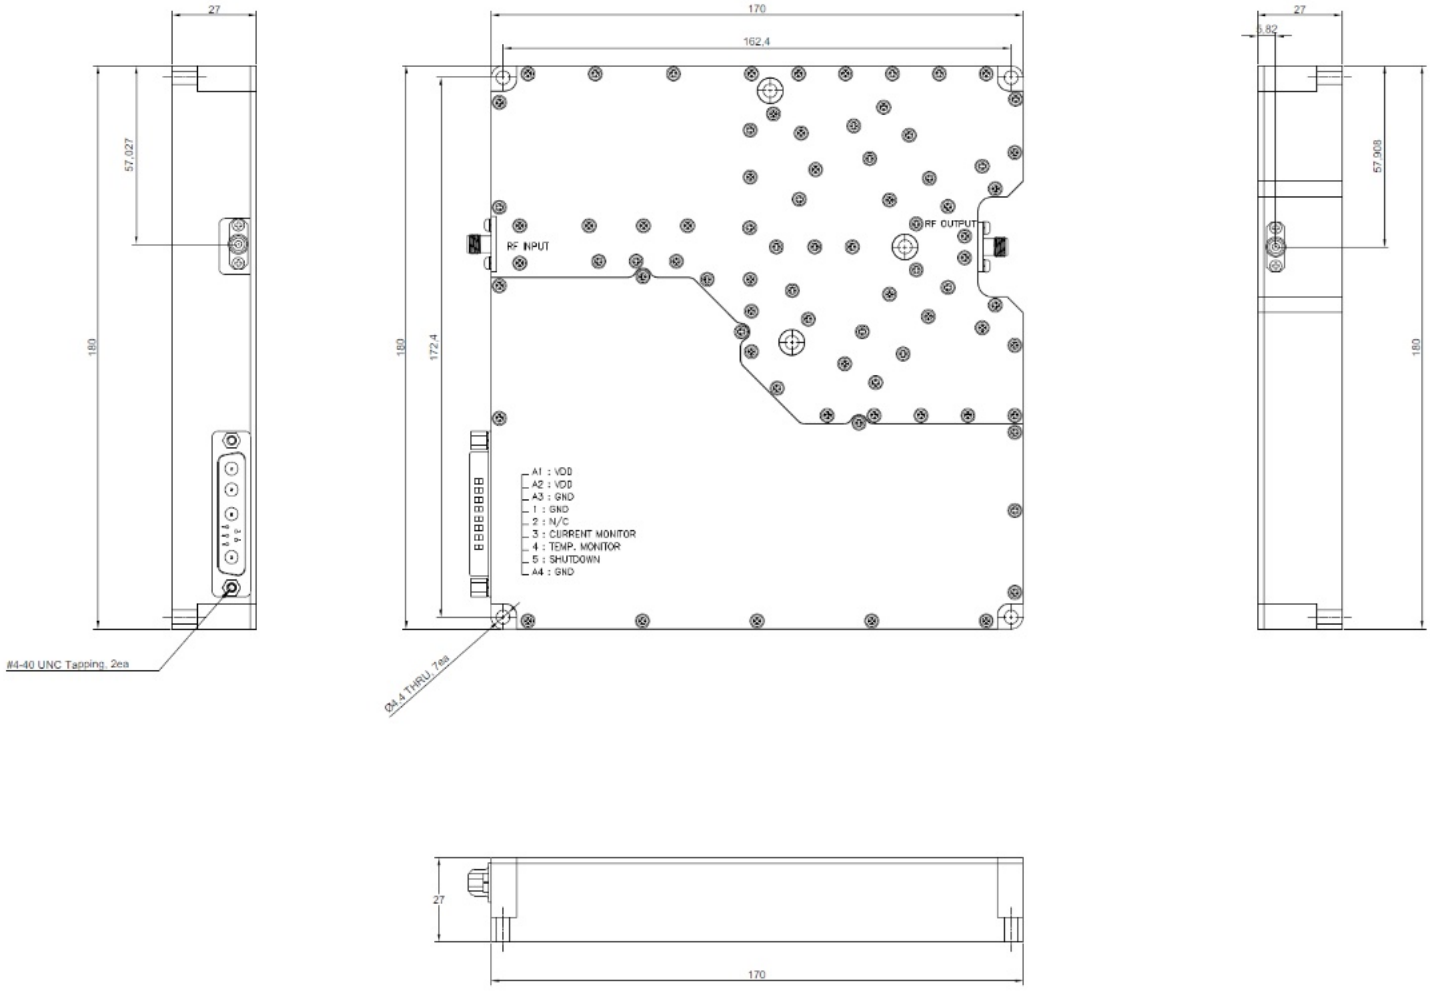

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com

Specifications subject to change without notice. Specifications and drawings may vary with selected options.