HD31133
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB GaN design
Instantaneous ultra wide Bandwidth
Built-in protection circuits
Suitable for all single channel modulation standards
High reliability and ruggedness
LEGACY PN: AMP1082



ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	1 - 20 GHz	
Power Output Psat	4 Watt Min / 5 - 6 Watt Typ	3W Typ @ 18-20GHz
Power Output P1dB GCP	1 Watt Typ	CW
Small Signal Gain	37 dB Min	
Power Gain Flatness	4 dB p-p Max	
Input Return Loss	<-10 dB Typ	
Harmonics	-20 dBc Typ	-10dBc Typ @ 1-2GHz @ rated Pout
Noise Figure	8 dB Max	
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	22 - 24VDC Nom	
Current Consumption	1.8 Amp Max / <1.5 Amp Typ	At rated Pout
Max input Power Protection	+5 dBm Max	<10 Sec without damage
Load VSWR Protection	5 : 1 Max	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +70°C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	90 x 85 x 22mm	Excluding connectors
Weight	300 gr.	
RF Connectors In/Out	SMA female	
DC Power	Feed Thru	
Cooling	External Heatsink	Forced air required


PIN ASSIGNMENT

Pin	Function	Description
1	DC Voltage	+22 - 24VDC
2	GND	GND

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD31133
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

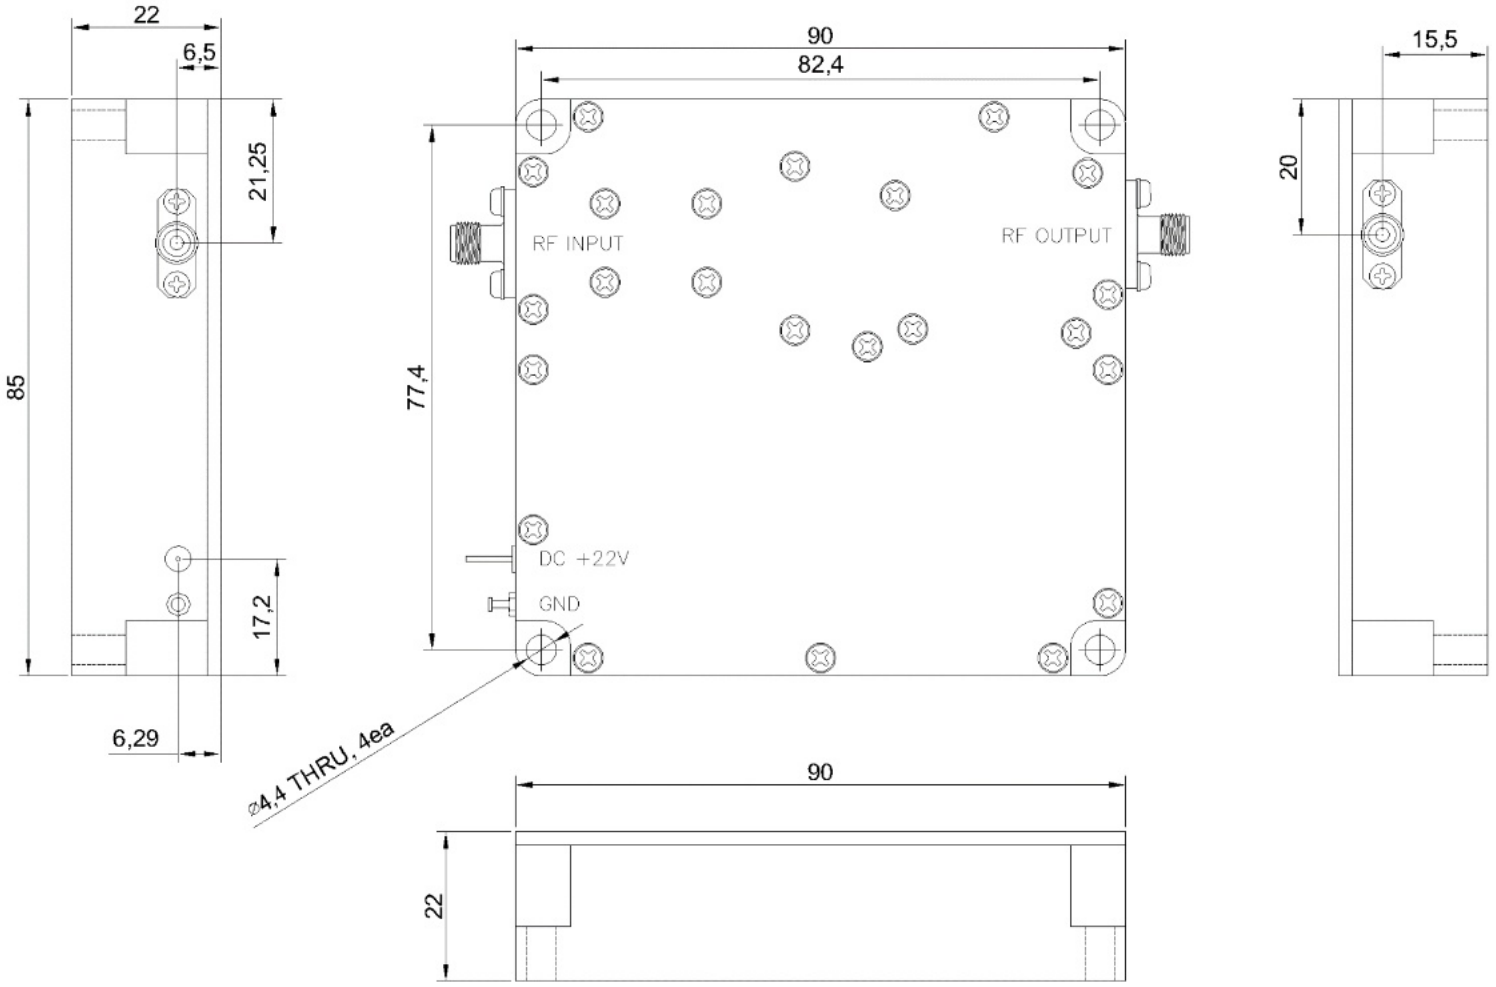

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD31133
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

TYPICAL TEST DATA

Freq. [GHz]	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Input [dBm]	-6.0	-7.0	-6.0	-8.0	-6.0	-6.0	-5.0	-5.0	0	0	0	0	0	0	0	0	0	0	0	0
Psat[W]	4.2	5.8	5.9	6.4	7.3	6.4	5.8	5.9	5.9	5.7	6.2	5.6	5.6	4.6	5.2	4.8	5.0	5.0	3.6	2.3
P1dB[W]	1.51	1.66	1.27	1.66	1.66	1.55	1.26	1.32	1.11	0.92	0.89	0.85	0.78	0.69	0.84	0.91	1.11	0.98	1.09	0.76
Current[A]	1.15	1.15	1.29	1.30	1.29	1.28	1.37	1.33	1.39	1.46	1.35	1.52	1.43	1.61	1.45	1.52	1.47	1.42	1.36	1.24

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.