HD31136
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear GaN hybrid design
Instantaneous wide bandwidth
Suitable for all modulations standards
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	2.0 - 18.0 GHz	
Power Output	5 Watt Min	CW
Power Gain	37 dB Min	
Power Gain Flatness	4.0 dB p-p Max	Constant input power
Input / Output Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	>30 dBc Typ	27 dBm/Tone, Δ = 1MHz
Harmonics	>15 dBc Typ	At rated Pout
Non Harmonics Spurious	>60 dBc Min	
Noise Figure	10 dB Max	
Operating Voltage	32 VDC Nom	
Current Consumption	2.0 Amp Max	At rated Pout
Max Input Power	+10 dBm	Without damage
Load VSWR Protection	3 : 1	

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +65 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	130 x 90 x 27mm	Excluding connectors
Weight	TBD	
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required


D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	FWD	Reserved
2	VVA	Reserved
3	CURRENT SENSOR	I_D@50mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	Enable = TTL "Hi" or open / Disable = TTL "Lo" or short
6,7	VDD	32VDC
8,9	GND	Ground

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD31136
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

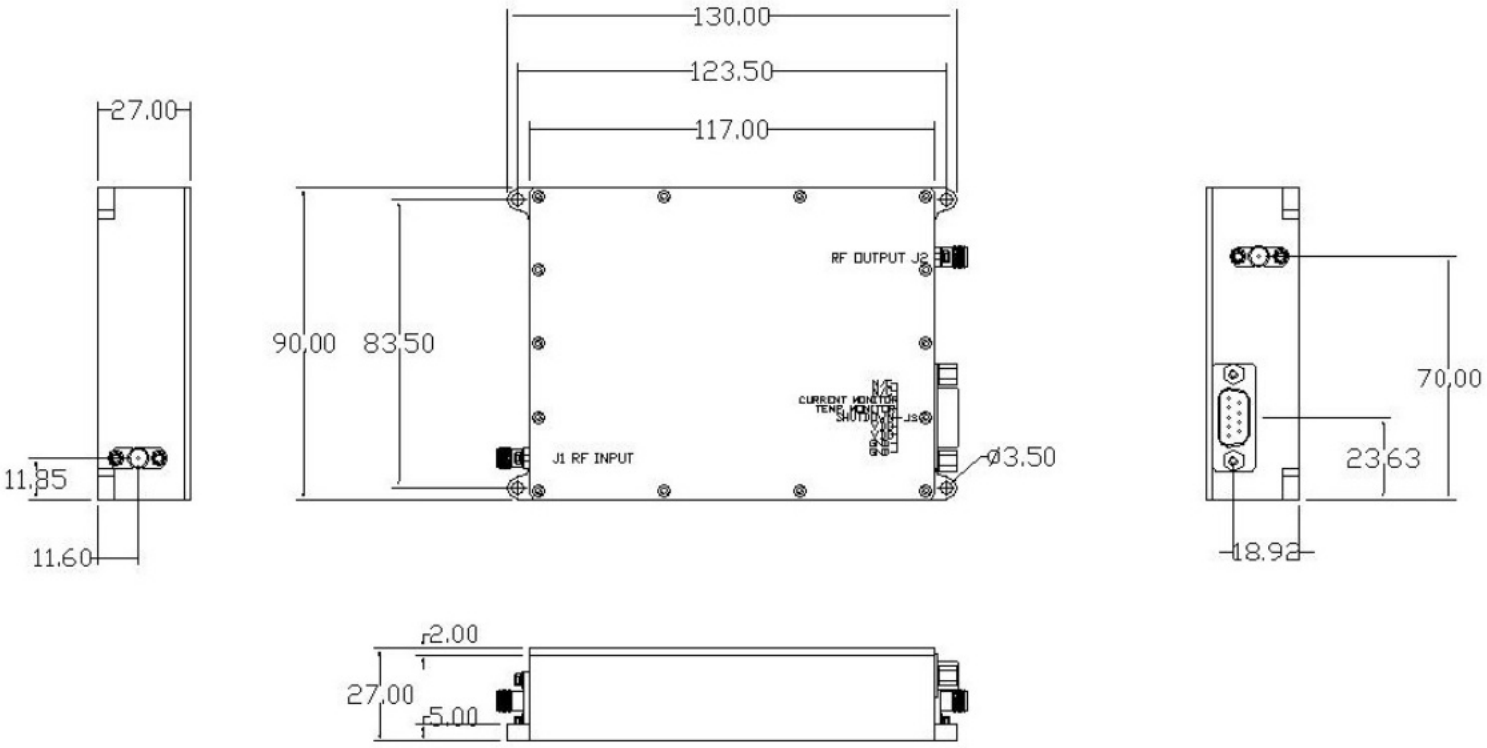

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.