HD31141
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear Advanced technology design
Instantaneous ultra-wide bandwidth
Suitable for all single channel modulations standards
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	2.0 - 20.0 GHz	
Power Output	20 Watt Min	CW
Power Gain	43 dB Min	
Power Gain Flatness	4 dB p-p Max	8dBp-p @ 2-2.5GHz
Input Return Loss	-10 dB Max	
Harmonics	-15 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	32 VDC ±0.5V	
Current Consumption	<10 Amp Typ	At rated Pout
Input Power Protection	+3 dBm Max	<10 Sec without damage
Load VSWR Protection	5 : 1 Max	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +65 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	225 x 195 x 27 mm	Excluding connectors
Weight	2.35 Kg.	
RF Connectors In/Out	Hi Freq. SMA female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required


D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	N/A	N/A
2	N/A	N/A
3	CURRENT SENSOR	ID@20mV/100mA Typ
4	TEMP SENSOR	VT@10mV/°C + 500mV Typ
5	SHUTDOWN	Enable = TTL "Hi" or open / Disable = TTL "Lo" or short
6, 7	VDD	32VDC
8, 9	GND	Ground

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD31141
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

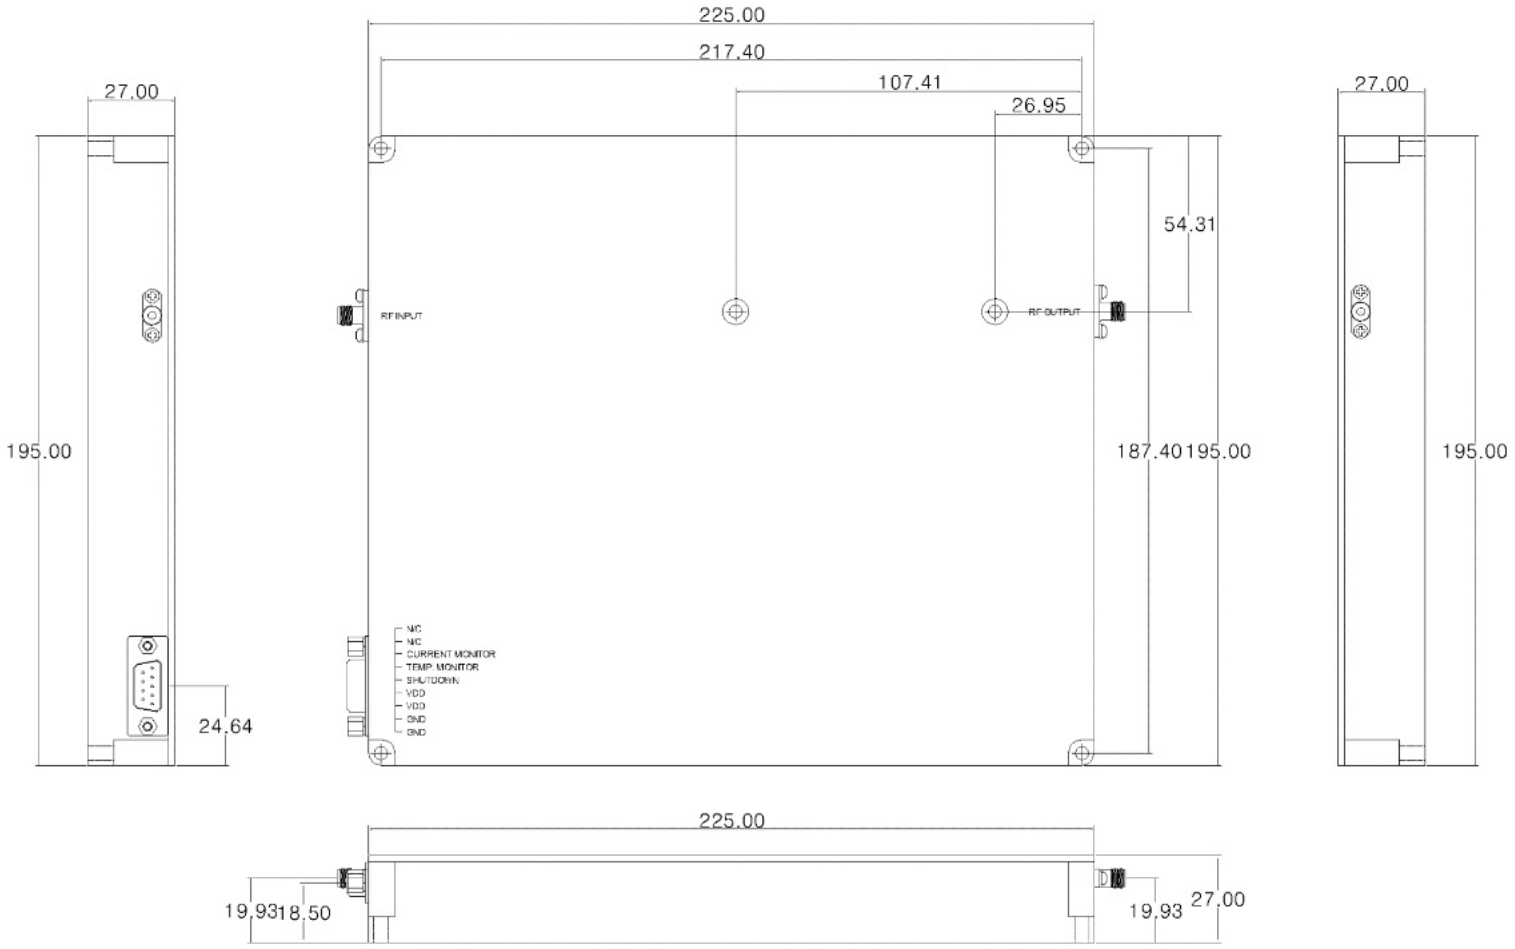

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com

Specifications subject to change without notice. Specifications and drawings may vary with selected options.