
HD31156
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear hybrid GaAs and GaN design
Instantaneous ultra-wide bandwidth
Suitable for all single channel modulation standards
Suitable for C, X and Ku band applications
Built-in protection circuits
High reliability and ruggedness
I



ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	6.0 - 18.0 GHz	
Power Output @ Psat	40 Watt Min	Pin = ≤0dBm for Nom Pout
Power Output @ P1dB	25 Watt Typ	For Reference only
Power Gain	46 dB Min	
Power Gain Flatness	4.0 dB p-p Max	
Input Return Loss	-10 dB Max	
Harmonics	-20 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Noise Figure	10 dB Max	
Operating Voltage	32 VDC Nom	
Current Consumption	<14 Amp Typ / 15 Amp Max	At rated Pout
Input Power Protection	+3 dBm Max	<10 Sec without damage
Load VSWR Protection	3 : 1 Max	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +65 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	180 x 200 x 27 mm / (7.09 x 7.87 x 1.06 inch)	Excluding connectors
Weight	5.2 Kg	
RF Connectors In/Out	SMA female	Cover Flange
DC Power / Interface Connector	7-Pin Hybrid D-Sub	
Cooling	External Heatsink	Forced air required


D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	GND	Ground
2	N/C	N/A
3	CURRENT SENSOR	I_D@20mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	Enable = TTL "Hi" or open / Disable = TTL "Lo" or short
A1	VDD	32VDC
A2	GND	Ground

38 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD31156
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

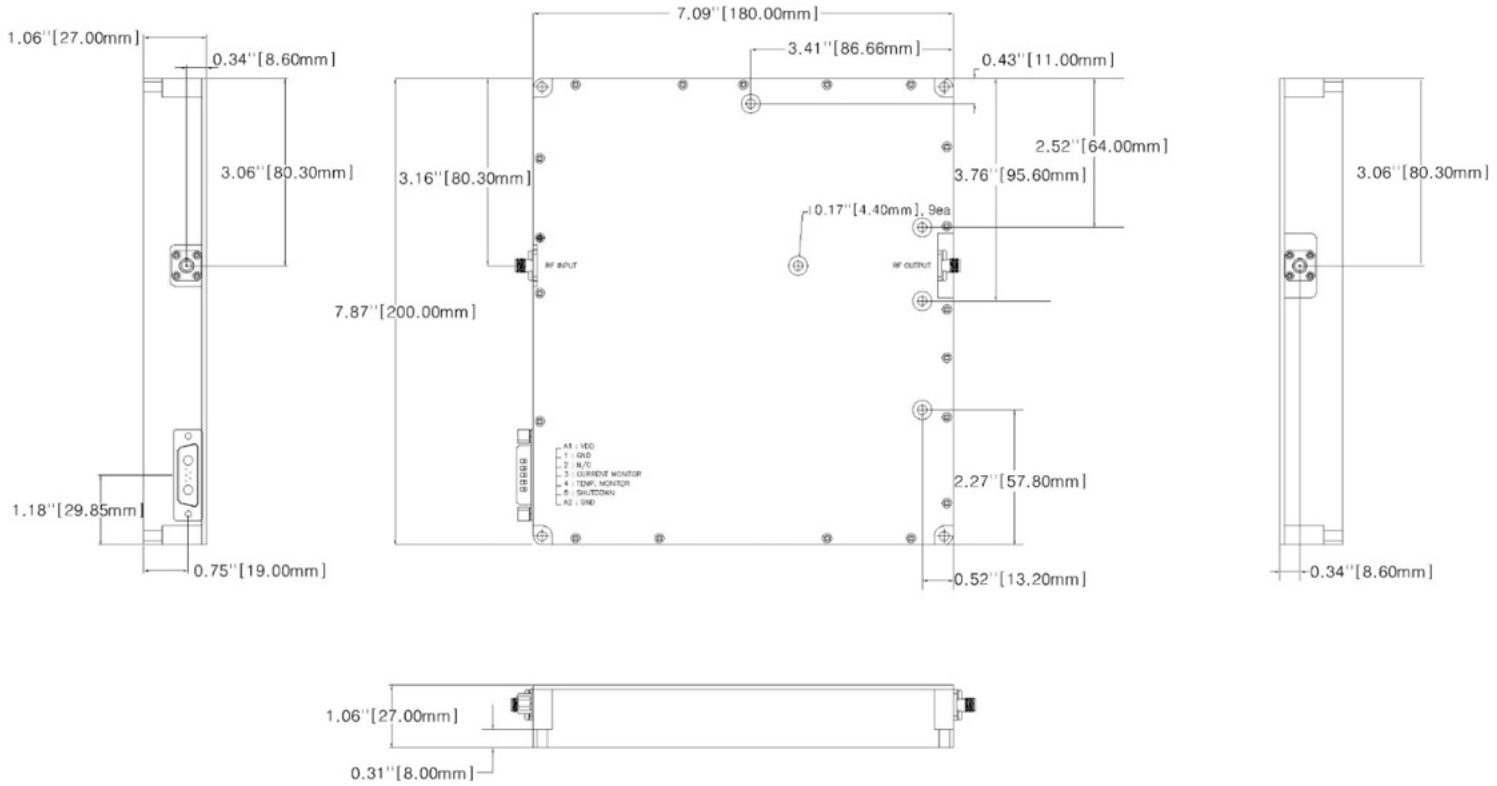

38 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com

Specifications subject to change without notice. Specifications and drawings may vary with selected options.