
HD31261
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear GaN design
Instantaneous wide bandwidth
Suitable for all single channel modulation standards
Built-in protection circuits
High reliability and ruggedness

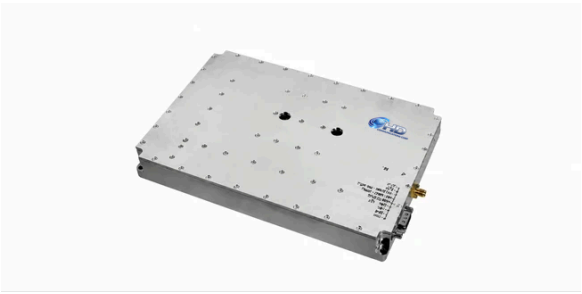

ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	0.8 - 4.2 GHz	
Power Output @ Psat	100 Watt Min	0.3dB lower @ 4.0-4.2GHz @ CW
Output Power @ P1dB	40 Watt Min	CW
Power Gain	50 dB Min	0dBm or less for rated Pout
Power Gain Flatness	3.0 dB p-p Max	Constant input power
Input Return Loss	-10 dB Max	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-30dBc Typ	40 dBm/Tone, Δ = 1MHz
Harmonics 2^{nd}/ 3^{rd}	-15 dBc / -20 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	32 VDC Nom	
Current Consumption	16 Amp Max	At rated Pout
Input Power Protection	+8 dBm Max	<10 Sec without damage
Load VSWR Protection	5 : 1 Max	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +75 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	220 x 144 x 27 mm	Excluding connectors
Weight	1.7 Kg.	
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	7-Pin Hybrid D-Sub	7W2
Cooling	External Heatsink	Forced air required


D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	N/C	N/C
2	VVA	Option-103
3	CURRENT SENSOR	I_D@20mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	Enable = TTL High or Open; Disable = TTL Low or Short
A1	VDD	32VDC
A2	GND	Ground

38 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD31261
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

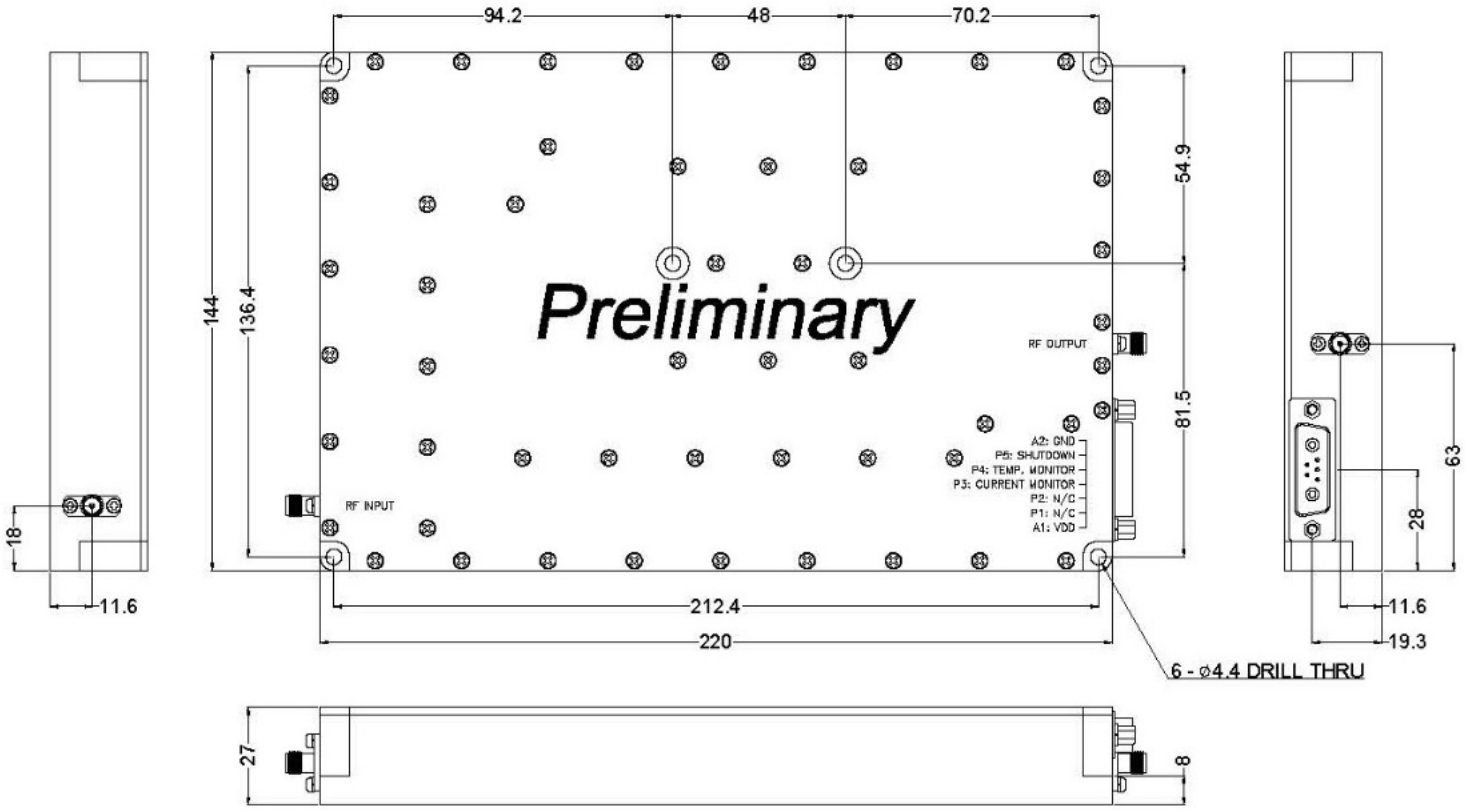

38 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com

Specifications subject to change without notice. Specifications and drawings may vary with selected options.