
HD31785
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB GaN design
Instantaneous ultra-wide Bandwidth
Full coverage of C, X and Ku Bands
Suitable for all single channel modulation standards
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	4.0 - 18.0 GHz	
Power Output @ Psat	10 Watt Min	CW
Power Gain	45 dB Min	
Power Gain Flatness	5 dB p-p Max	
Input Return Loss	-10 dB Max	
Harmonics 2nd/3rd	-20 dBc Typ	
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	32 VDC Nom	
Current Consumption	5.0 Amp Max	At rated Pout
Max Input Power	0 dBm Max	<10 Sec without damage
Load VSWR Protection	3 : 1 Max	

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +65 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	160 x 140 x 27mm	Excluding connectors
Weight	1.2 Kg.	
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required

D-SUB CONNECTOR PIN ASSIGNMENT


Pin	Function	Description
1	N/A	N/A
2	N/A	N/A
3	CURRENT SENSOR	I_D@50mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	Enable = TTL "High" or OPEN / Disable = TTL "Low" or GND
6, 7	VDD	32VDC
8, 9	GND	Ground

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.

HD31785
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

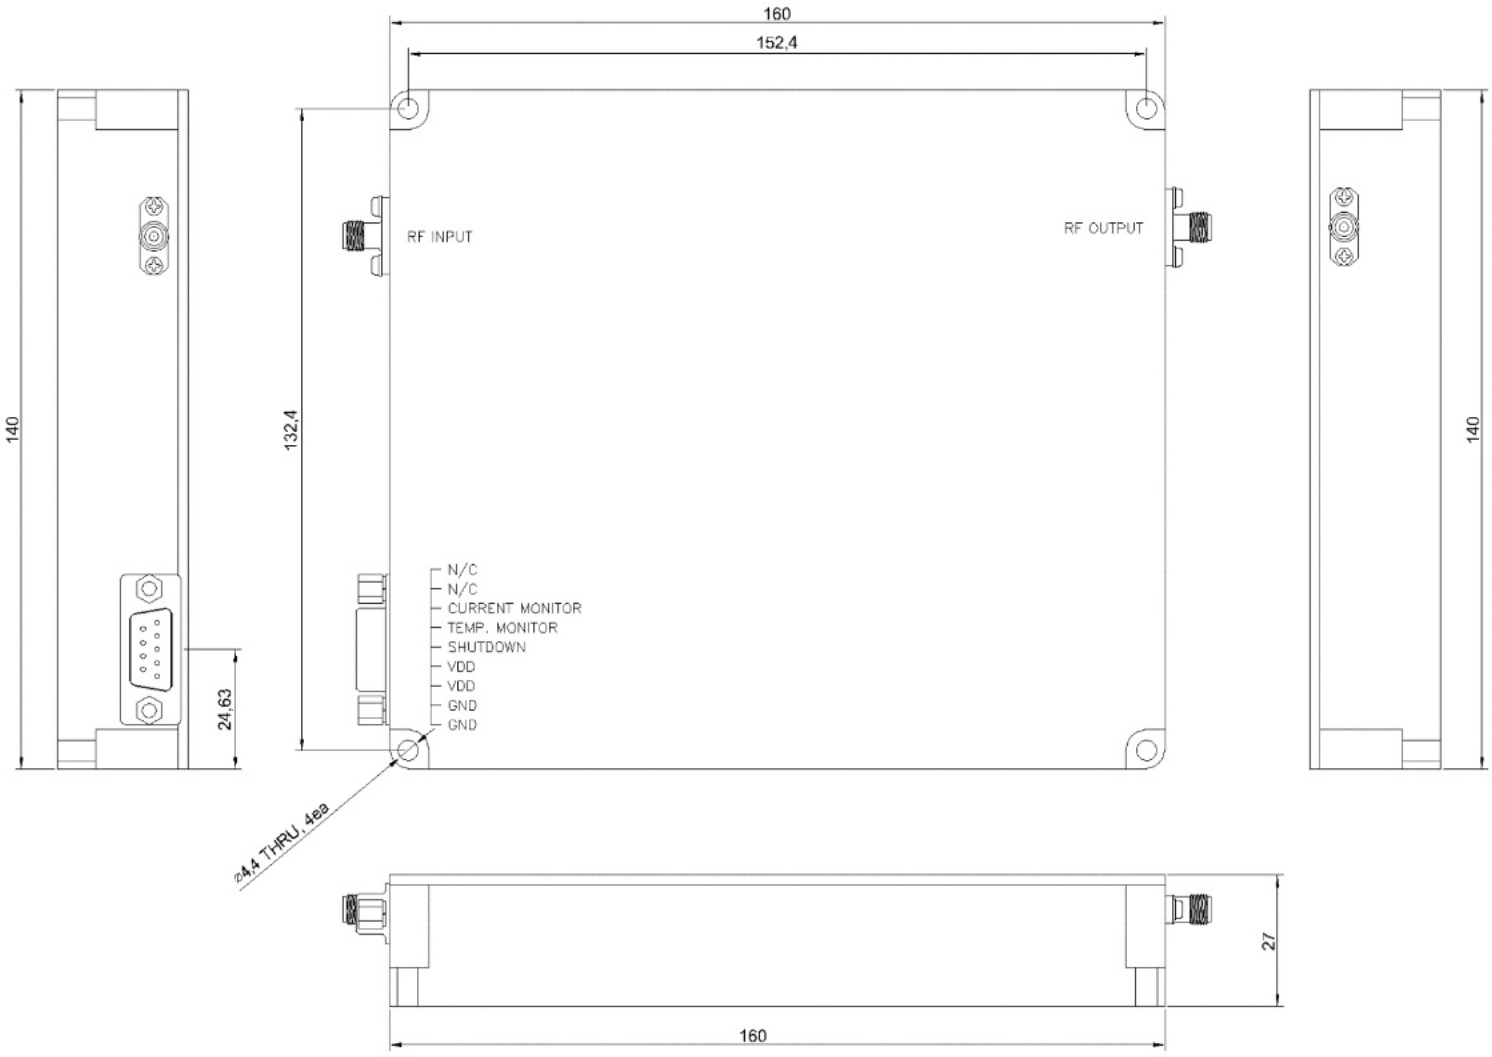

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.