HD31934
SOLID STATE MID POWER AMPLIFIER

FEATURES

Class AB linear GaN design
Instantaneous ultra-broad Bandwidth
Suitable for all single channel modulation standards
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	10 - 6000 MHz	
Power Output @ Psat	2 Watt Min	CW
Power Output @ P1dB	1 Watt Typ	CW
Small Signal Gain	33 dB Min	0dBm or less for rated Pout
Power Gain Flatness	6 dB p-p Max	Constant input power
Input Return Loss	-10 dB Typ	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-25 dBc Typ	23dBm/Tone, Δ = 1MHz
Harmonics	-15 dBc Typ	At rated Pout
Noise Figure	10 dB Max	
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	28 VDC ±0.2 V	
Current Consumption	1.0 Amp Max	At rated Pout
Input Power Protection	+3 dBm Max	< 10 Sec without damage
Load VSWR Protection	3 : 1 Max	<1 minute @ rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +70°C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal Transport[1]	

1 MIL Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	90 x 85 x 22 mm	Excluding connectors
Weight	350 gr.	
RF Connectors In/Out	SMA female	
DC Power	Feed Thru	
Cooling	External Heatsink	Forced air required


PIN ASSIGNMENT

Pin	Function	Description
1	VDD	+28VDC
2	GND	GND

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD31934
SOLID STATE MID POWER AMPLIFIER

OUTLINE DRAWING

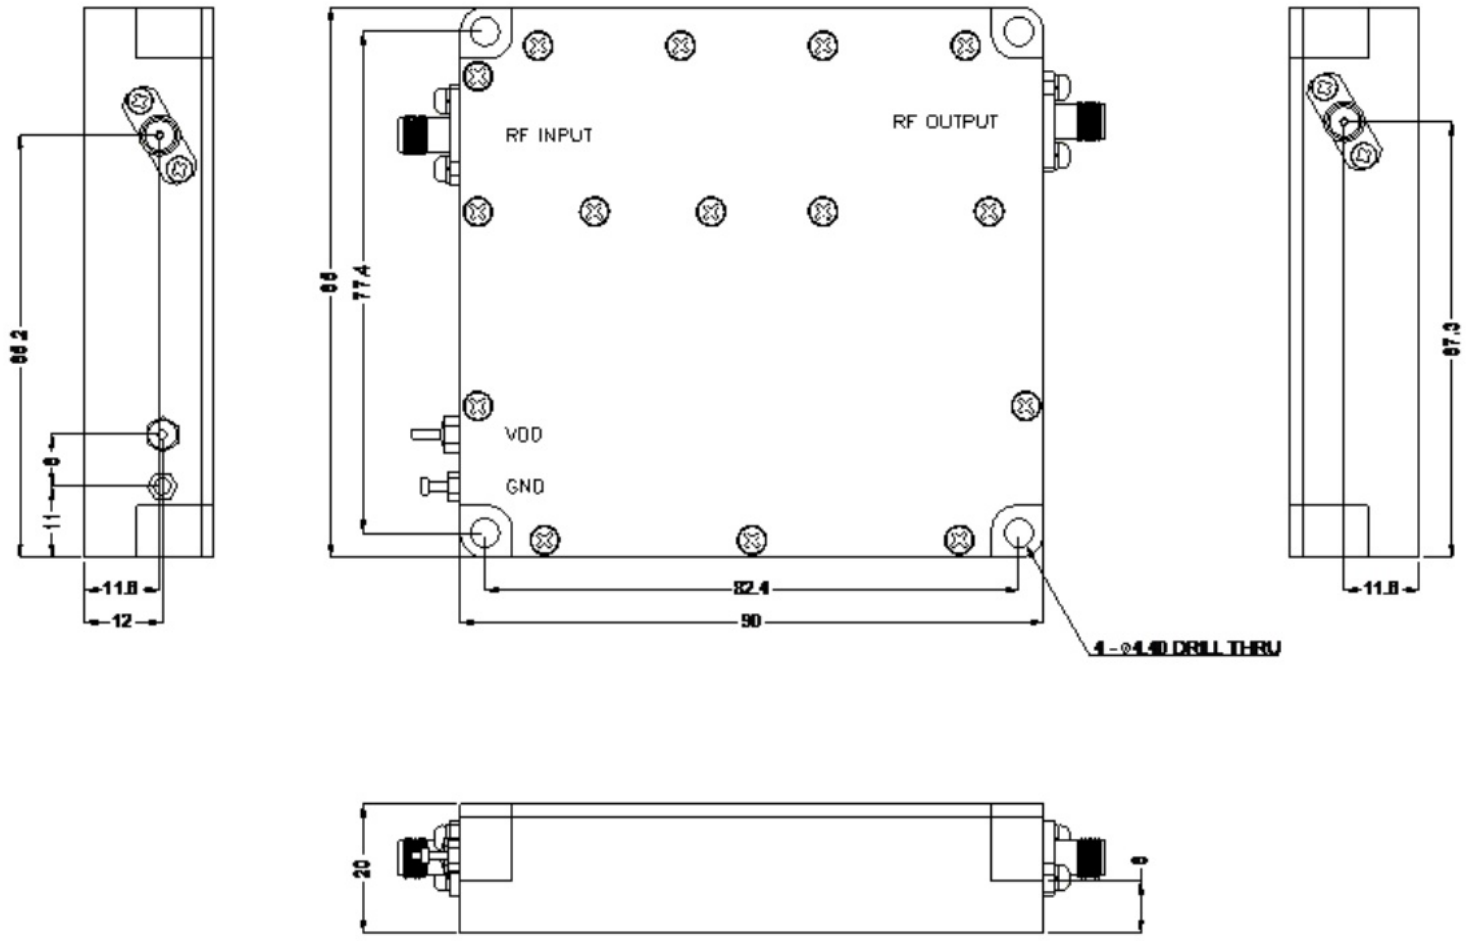

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.