
HD31988
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear Chip & wire GaN design
Instantaneous ultra-wide bandwidth
Suitable for all single channel modulation standards
Suitable for C, X and Ku band applications
Built-in protection circuits
High reliability and ruggedness

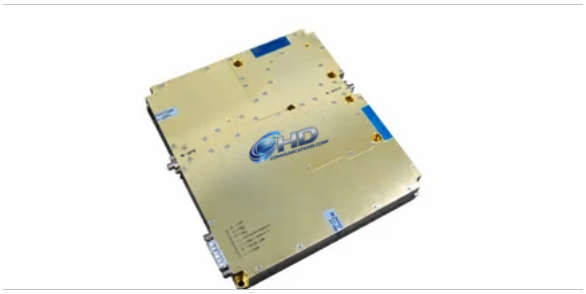

ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	6.0 - 18.0 GHz	
Power Output Psat	50 Watt Min	CW
Power Gain	47 dB Min	0dBm or less for rated Pout
Power Gain Flatness	4.0 dB p-p Max	
Input Return Loss	-10 dB Max	
Harmonics	-15 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Noise Figure	10 dB Max	
Operating Voltage	32 VDC Nom	
Current Consumption	18 Amp Typ / 20 Amp Max	At rated Pout
Input Power Protection	+3 dBm Max	<10 Sec without damage
Load VSWR Protection	3 : 1 Max	<1 minute @ rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +65°C	
Storage Temperature	-40 to +85°C	
Relative Humidity	5 to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	180 x 200 x 27 mm / (7.09 x 7.87 x 1.06 inch)	Excluding connectors
Weight	5.4 Kg	
RF Connectors In/Out	SMA female	Cover Flange
DC Power / Interface Connector	7-Pin Hybrid D-Sub	
Cooling	External Heatsink	Forced air required

D-SUB CONNECTOR PIN ASSIGNMENT


Pin	Function	Description
1	GND	Ground
2	N/C	N/A
3	CURRENT SENSOR	I_D@20mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	Enable = TTL "Hi" or open / Disable = TTL "Lo" or short
A1	VDD	32VDC
A2	GND	Ground

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.

HD31988
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

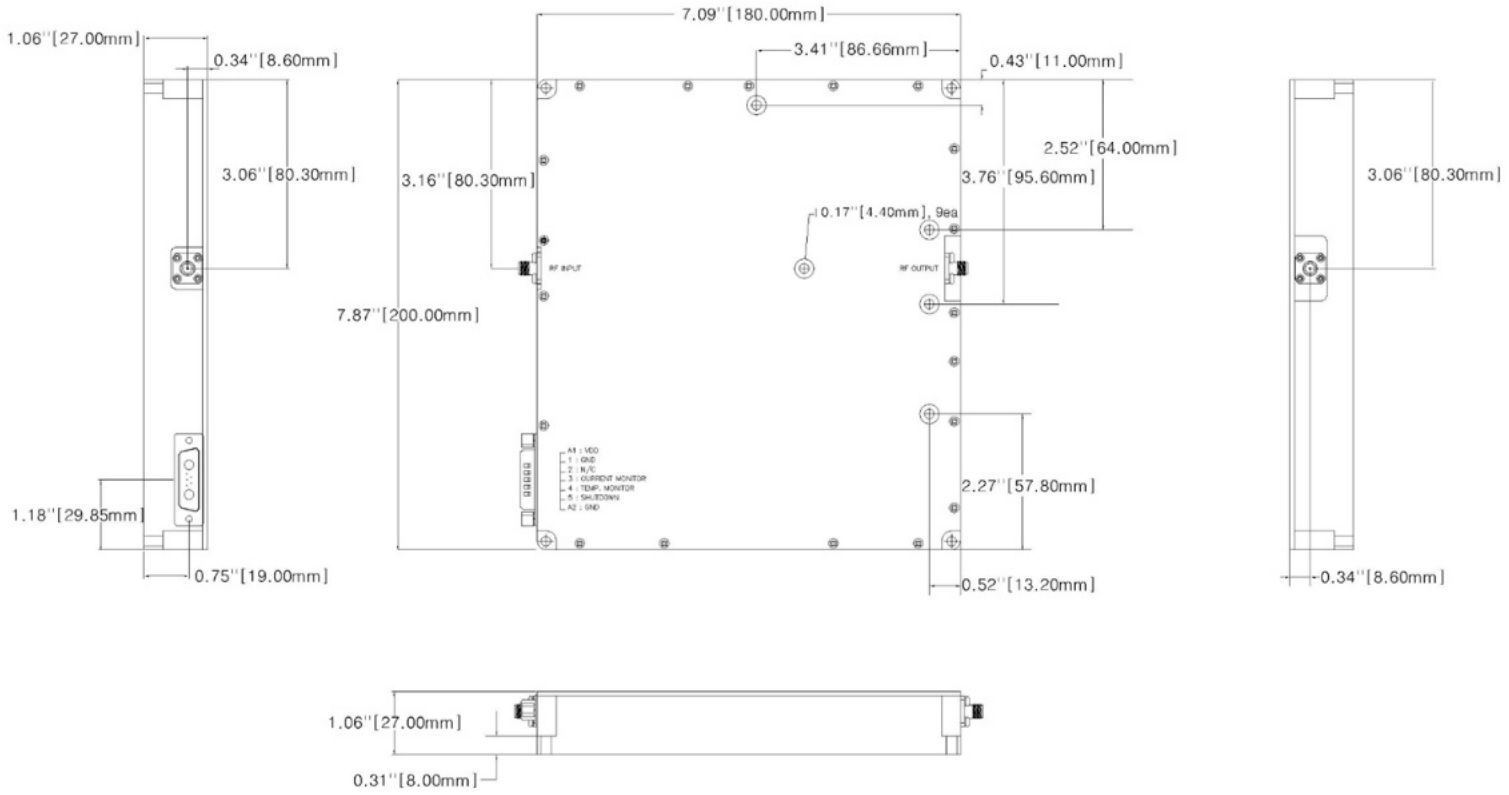

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.