HD32021
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Designed for EMI/RFI, lab, CW/Pulse and all communication applications
Small form factor, rack mounted system
Class A/AB Linear design
High Power Advanced technology devices
Instantaneous ultra-wide bandwidth
Built-in protection circuits, with extensive monitoring
Local LCD & remote flexible interfaces
High efficiency, with unprecedented reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification		Notes
Band	A	B	
Operating Frequency Range	100 - 1000 MHz	1.0 - 6.0 GHz	Band switching @ 15 mS Max
Power Output @ Psat	10 Watt Min		CW or Pulse
Power Gain	40 dB Min		0dBm or less for rated Pout
Power Gain Flatness	4.0 dB p-p Max		Constant input power
Gain Adjustment Range	20 dB Min		Local or remote
Input Return Loss	-10 dB Max		
2-Tone Intermodulation (IMD)	-30 dBc Typ		30dBm/Tone, Δ = 1MHz
Harmonics	<-20 dBc Typ		At rated Pout
Spurious	-60 dBc Max		Non-harmonics
Operating Voltage	100 - 240 VAC		47 - 63 Hz
Power Consumption	300 Watt Max		At rated Pout
Input Power Protection	+10 dBm Max[1]		
Load VSWR Protection	4 : 1: Max[2]		Foldback @ preset limit

1 Units with optional digital monitor and control, for basic units <10 Sec without damage
2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50°C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport[3]	

3 MIL Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D (No display with DMC)	430 x 88 x 600 mm	2U, excluding handles
Dimensions W x H x D (with Option DMC)	430 x 133 x 600 mm	3U, excluding handles
Weight	(2U/10 kg.) (3U/14kg.)	
RF Conn. In / Out / Sample (optional)	N-Female	Front or Rear Panel
Interface Connector	9-Pin D-Sub	Rear panel
AC Power	IEC 60320-C14	Or equivalent
Cooling	Built in Fan Cooling	Variable speed
STANDARD: Digital Monitor & Control[4] FWD, REV, VSWR, GAIN, ALC, V & I, TEMP, **OPTIONAL**: Safety Interlock	Ethernet RJ-45 TCP/IP, RS422/485, USB Open=STBY/Short=RFON	BNC Female on rear panel

4 DMC option may reduce Pout by 1dB.

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.


HD32021
SOLID STATE HIGH POWER AMPLIFIER

AVAILABLE SPECIAL OPTIONS

Parameter	Specification	Notes
Option FRS: Forward RF Sample	-40dB, Type N-Female	Front or rear panel
Option RRS: Reflected RF Sample	-40dB, Type N-Female	Front or rear panel
Option GPIB: GPIB remote control	GPIB IEEE-488 Remote capability	
Included CPM: Calibrated Power Monitoring (With purchase of Option DMC)	Offset correction entry for +/- 0.2dB accuracy	11-points standard[5]

5 Consult with factory if additional points would be required

OUTLINE DRAWING
3U-SHOWN WITH LCD DIGITAL CONTROLLER

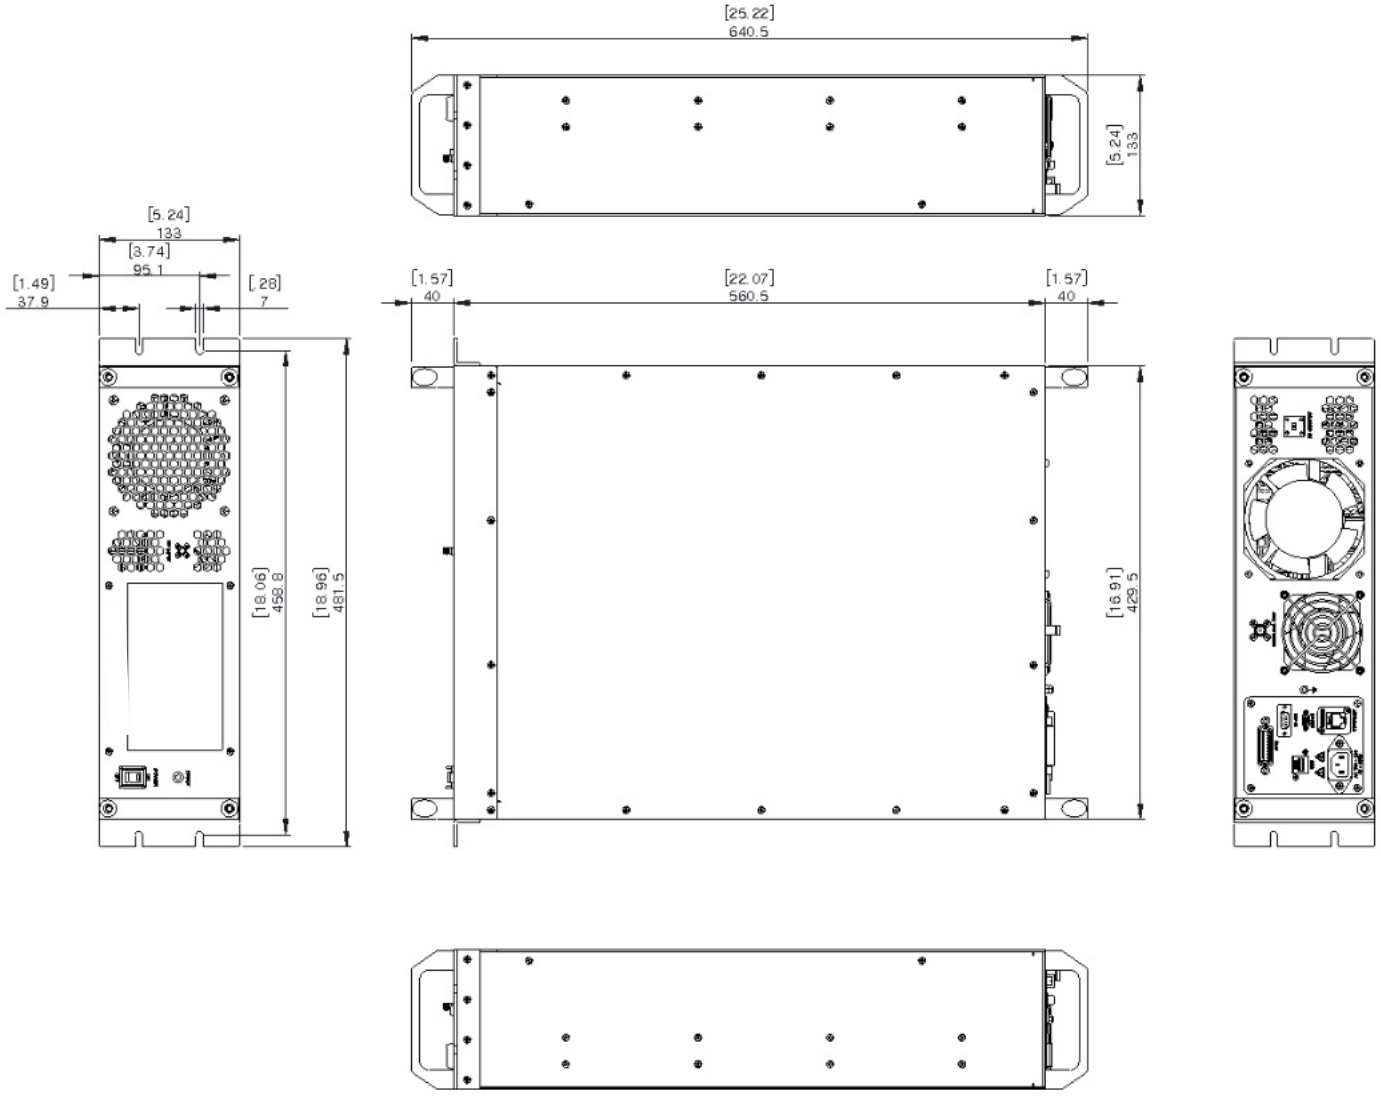


338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.

HD32021
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING
2U-BASIC MODEL, NO DISPLAY WITH DMC OPTION

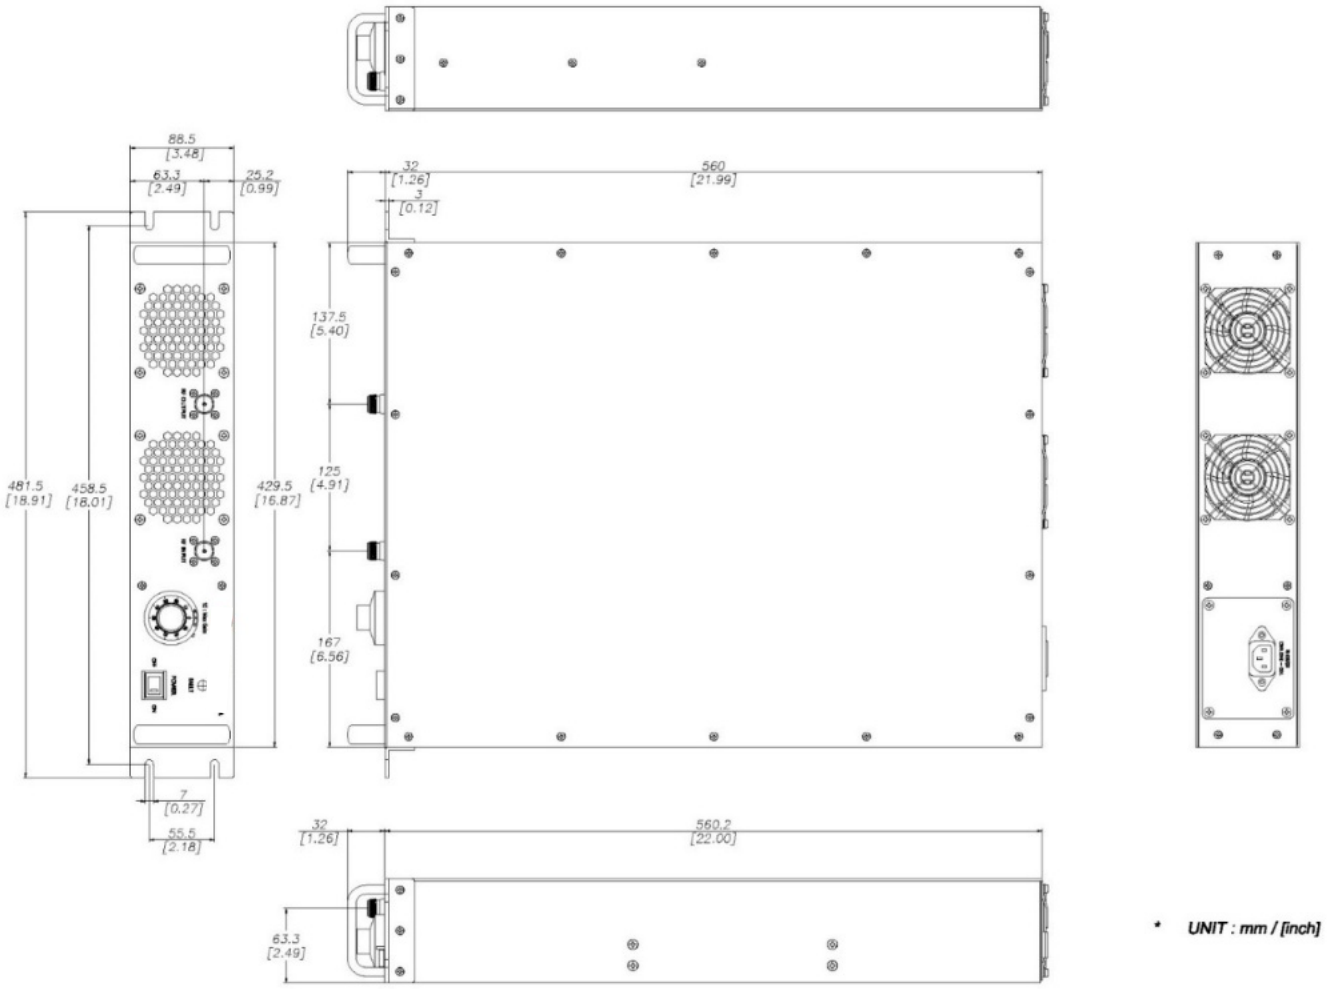

* UNIT : mm / [inch]

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.