HD32156
SOLID STATE HIGH POWER AMPLIFIERS

FEATURES

Designed for 5G, EMI/RFI, lab, CW/Pulse and general communication
Suitable for all single channel modulation standards
Small form factor, rack mounted system
Class A/AB Linear design
Built-in protection circuits, with extensive monitoring
Local LCD & remote flexible interfaces
High efficiency, with unprecedented reliability and ruggedness
Optional Integrated Synthesizer/Power Metering



ELECTRICAL SPECIFICATIONS : 25°C, 50Ω

Parameter	Specification	Notes
Operating Frequency Range	27 - 29 GHz	
Power Output @ Psat	10 Watt Min	CW or Pulse
Power Output @ P1dB	8 Watt Typ	
Power Gain	43 dB Min	0dBm or less for rated Pout
Power Gain Flatness	3.0 dB p-p Max	Constant input power
Gain Adjustment Range	20 dB Min	Local or Remote
Input / Output Return Loss	-10 dB Max	
2-Tone Intermodulation (IMD)	-30 dBc Typ	33 dBm/Tone, Δ = 1MHz
Harmonics	-20 dBc Typ	At rated output power
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	100 - 240 VAC Nom	47-63 Hz
Power Consumption	150 Watt Max	At rated output
Input Power Protection	+3 dBm Max[1]	
Load VSWR Protection	4 : 1: Max[2]	Foldback @ preset limit

1 Units with optional digital monitor and control, for basic units <10 Sec without damage
2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport[3]	

3 MIL Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D (No display with DMC)	430 x 88 x 560 mm	2U, excluding handles
Dimensions W x H x D (with Option DMC)	430 x 133.3 x 560 mm	3U, excluding handles
Weight	(2U/9 kg.) (3U/12kg.)	
RF Connectors In/Out	2.92 mm Female / WR28	Front or rear panel
Interface Connector	9-Pin D-Sub	Rear panel
AC Power	IEC 60320-C14	Or equivalent
Cooling	Built in Fan Cooling	Variable speed
STANDARD: Digital Monitor & Control[4] FWD, REV, VSWR, GAIN, ALC, V & I, TEMP, **OPTIONAL**: Safety Interlock	Ethernet RJ-45 TCP/IP, RS422/485, USB Open=STBY/Short=RFON	 BNC Female on rear panel

4 DMC option may reduce Pout by 1dB.

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.


HD32156
SOLID STATE HIGH POWER AMPLIFIERS

AVAILABLE SPECIAL OPTIONS

Parameter	Specification	Notes
Option IS: Integrated Synthesizer	Internal or External selections	Modulations: CW, Pulse, External
Option FRS: Forward RF Sample	-40dB, Type 2.92 mm Female	Front or rear panel
Option RRS: Reflected RF Sample	-40dB, Type 2.92 mm Female	Front or rear panel
Option GPIB: GPIB remote control	GPIB IEEE-488 Remote capability	
Included CPM: Calibrated Power Monitoring (With purchase of Option DMC)	Offset correction entry for +/- 0.2dB accuracy	5-points standard[5]
Option LC: Built in Quiet-Cool	Close circuit Air-liquid cooling	60 dBA Typ

5 Consult with the factory if additional points are required.


OUTLINE DRAWING
SHOWN WITH OPTIONAL LCD DIGITAL CONTROLLER

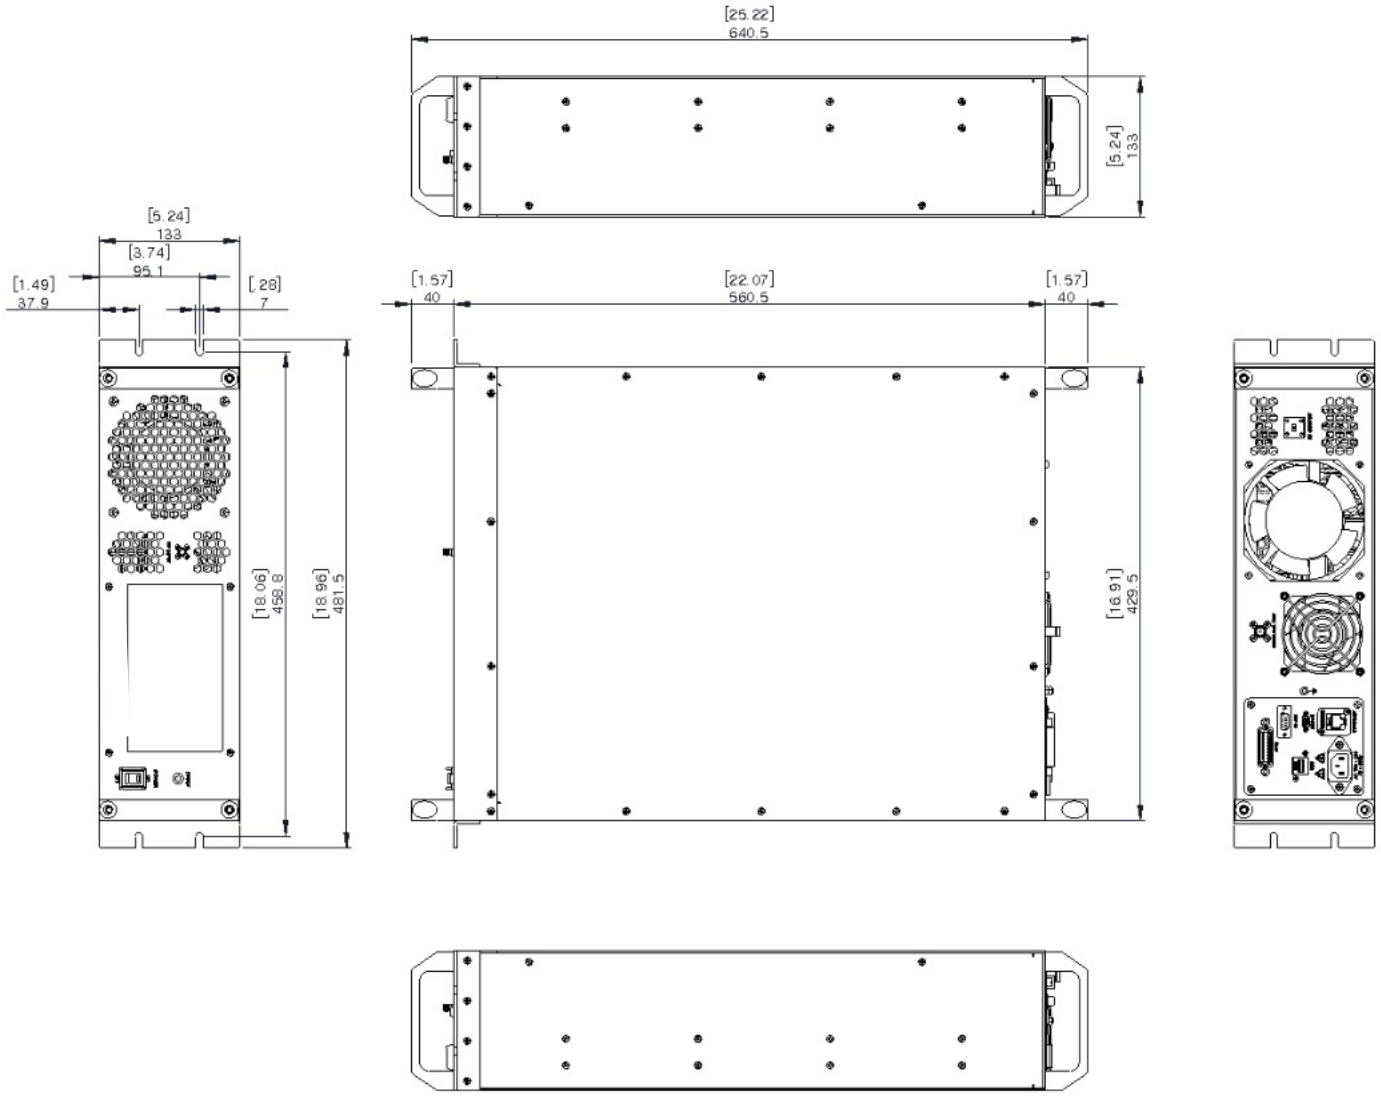

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.

OUTLINE DRAWING
BASIC MODEL, NO DISPLAY WITH DMC OPTION

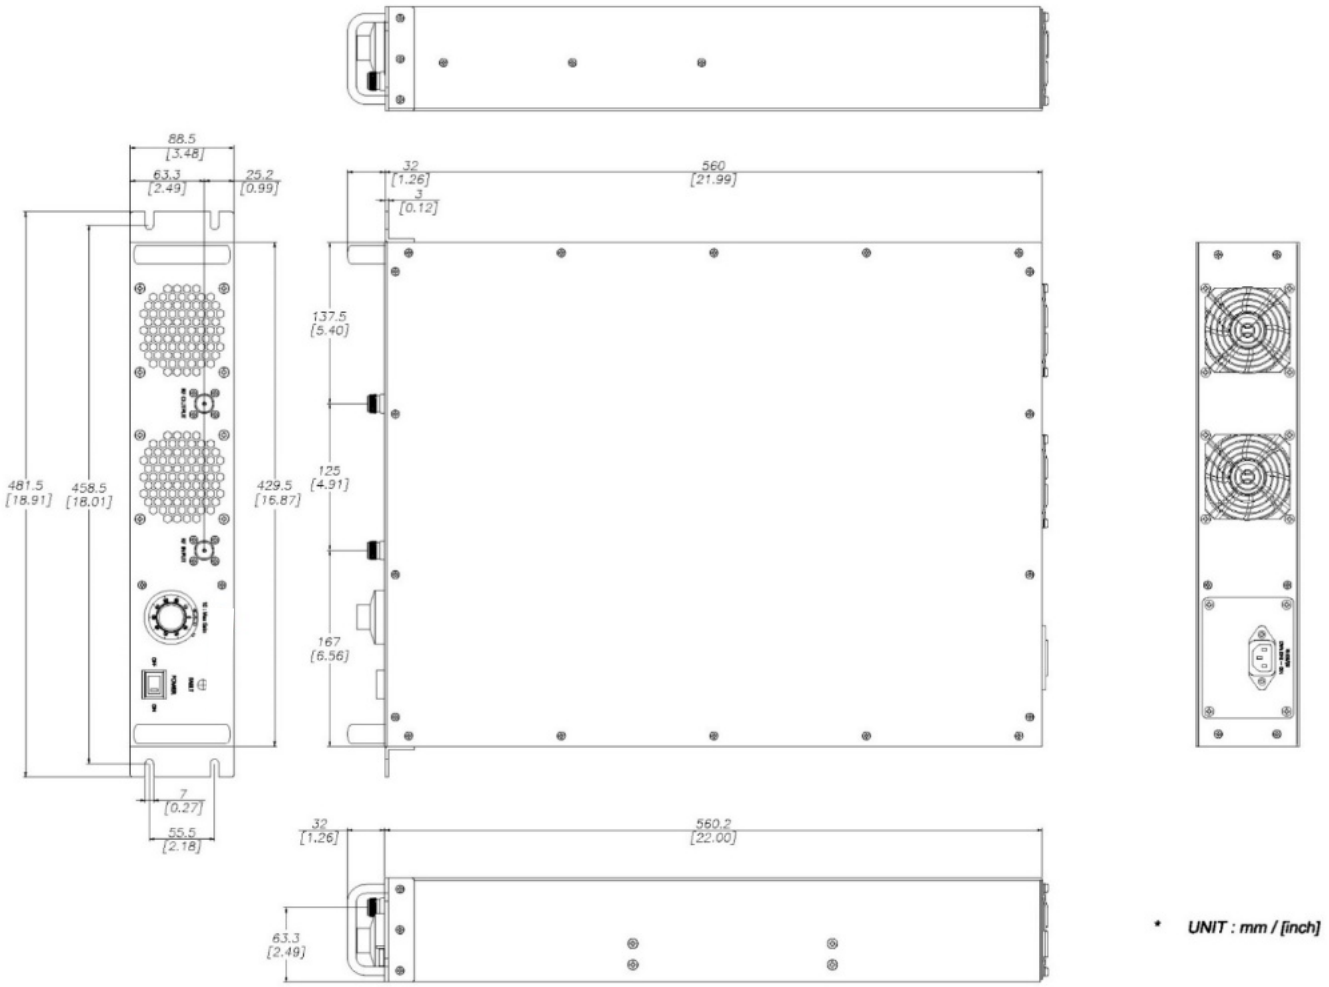

* UNIT : mm / [inch]

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.