HD32867
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Designed for EMI/RFI, lab, CW/Pulse and all communication applications.
Small form factor, rack mounted system
Class A/AB Linear design
High power advanced technology devices
Instantaneous ultra-wide bandwidth
Built-in protection circuits, with extensive monitoring
Local LCD & remote flexible interfaces
High efficiency, with unprecedented reliability and ruggedness

ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	10 kHz - 250 MHz	
Power Output @ Psat	1250 Watt Min / 1500 Watt Typ	CW
Power Output @ P1dB	700 Watt Typ	
Power Gain	62 dB Min	0dBm or less for rated Pout
Power Gain Flatness	4 dB p-p Max	Constant input power
Gain Adjustment Range	20 dB Min	Local or remote capable
Input / Output Return Loss	-10 dB Max	
2-Tone Intermodulation (IMD)	-30 dBc Typ	52dBm/Tone, Δ = 1MHz
Harmonics	-20 dBc Typ	At rated output
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	120/208, 3-Ph, 47 - 63 Hz	Opt: 230/400VAC, 3-Ph
Power Consumption	5000 Watt Max	At rated output
Input Power Protection	+8 dBm Max[1]	
Load VSWR Protection	4 : 1: Max[2]	Foldback @ preset limit
Sample Port Coupling (optional)	-60 dB	N-Female

1 Units with optional digital monitor and control, for basic units <10 Sec without damage
2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport[3]	

3 MIL Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	600 x 960 x 1150 mm	18U cabinet
Weight	120 Kg.	Nominal
RF Connectors In/Out/Sample	N-Female/716-Female/N-Female	Front or Rear Panel
Interface Connector	9-Pin D-Sub	Rear panel
AC Power	MS Connector	Or equivalent (IEC Connector)
Cooling: Built in Quiet-Cool	Close circuit Air-liquid cooling	
OPTIONAL: Digital Monitor & Control (DMC) FWD, REV, VSWR, GAIN, ALC, V & I, TEMP, Optional Safety Interlock (INT)	Ethernet RJ-45 TCP/IP, RS422/485, USB Optional GPIB Interface Open=STBY/Short=RFON	IEEE rear panel BNC-F rear panel

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.


HD32867
SOLID STATE HIGH POWER AMPLIFIER

AVAILABLE SPECIAL OPTIONS

Parameter	Specification	Notes
Option FRS: Forward RF Sample	-60dB, Type N-Female	Front or rear panel
Option RRS: Reflected RF Sample	-50dB, Type N-Female	Front or rear panel
Option GPIB: GPIB remote control	GPIB IEEE-488 Remote capability	
Included CPM: Calibrated Power Monitoring (With Option DMC Purchase)	Offset correction entry for +/- 0.2dB accuracy	12-points standard[4]

4 Consult the factory if additional points are required.

OUTLINE DRAWING
SHOWN WITH OPTIONAL LCD DIGITAL CONTROLLER

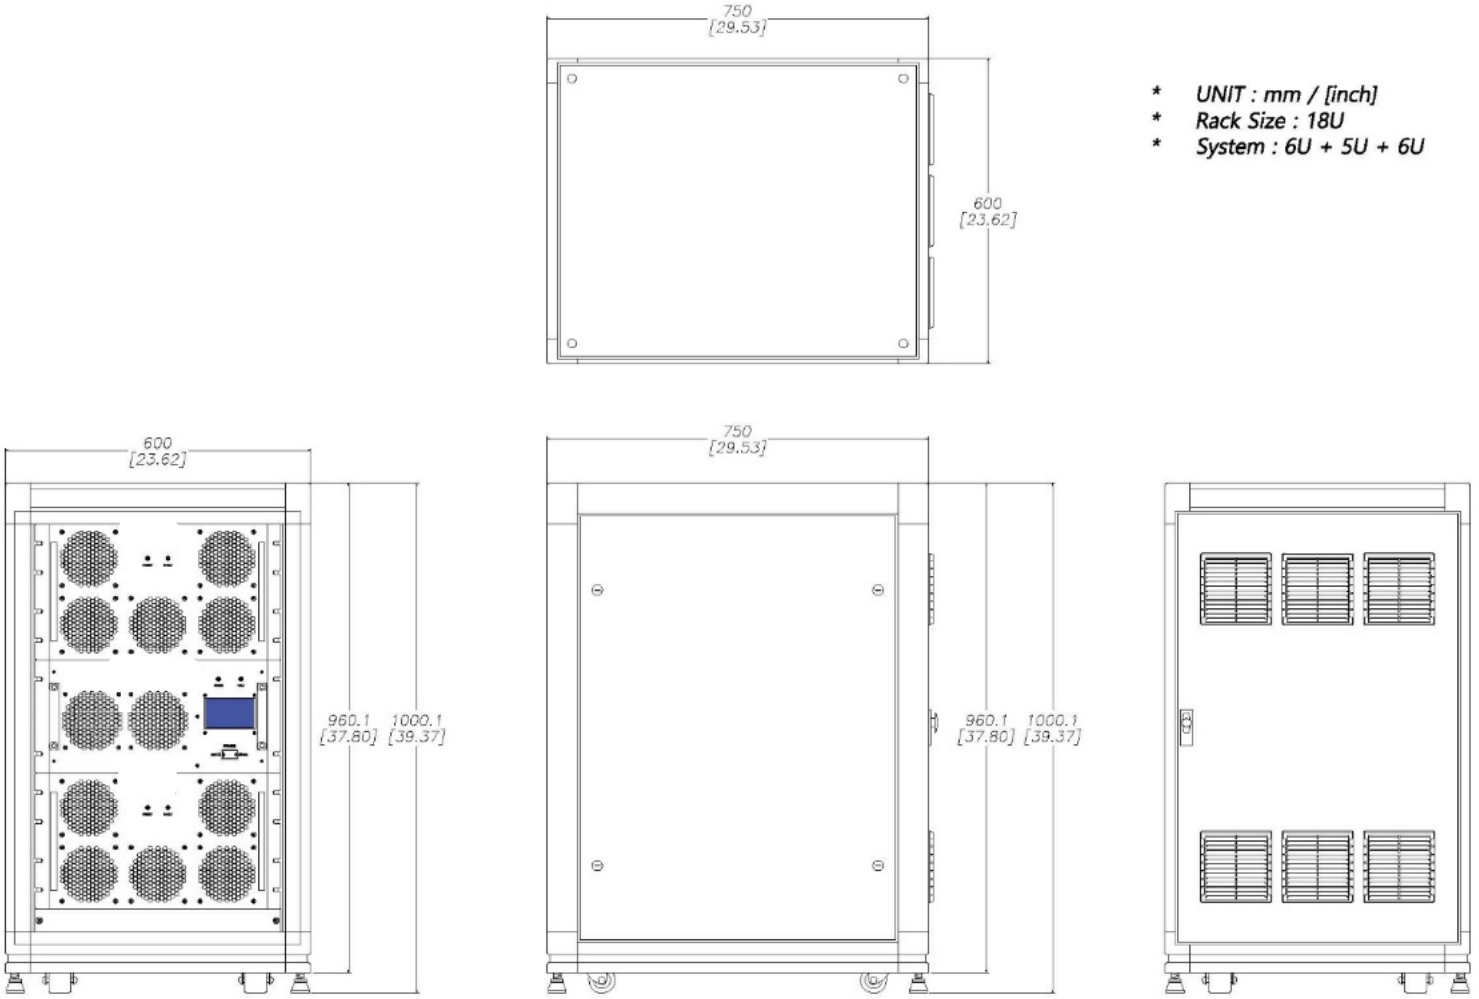

* *UNIT : mm / [inch]*
* *Rack Size : 18U*
* *System : 6U + 5U + 6U*

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.