HD32870
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear LDMOS design
Instantaneous HF frequency wide bandwidth
Suitable for all single channel modulation standards
Built-in monitoring and protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 50Ω, 25ºC

Parameter	Specification	Notes
Operating Frequency Range	1 - 32 MHz Min	
Power Output @ Psat	200 Watt Min	CW
Power Gain	53 dB Min	0dBm or less for rated Pout
Power Gain Flatness	2.0 dB p-p Max	Constant input power
Input Return Loss	-10 dB Max	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	<-30 dBc Typ	43 dBm/Tone, Δ = 1 MHz
Harmonics 2nd	<-20 dBc Typ	At rated Pout
Harmonics 3rd	<-12 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	35 VDC Nom	
Current Consumption	13 Amp Max	At rated Pout
Input Power Protection	+8 dBm Max	<10 Sec without damage
Load VSWR Protection	∞ : 1	<1 minute at rated output
Turn On / Off Speed	8 µSec Typ	Optional

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +75 ºC	
Storage Temperature	-40 to +85 ºC	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport[1]	

1 MIL Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	200 X 106 X 28 mm	Excluding connectors
Weight	700 gr.	Typical weight
RF Connectors In/Out	SMA female / Type-N female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required


38 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD32870
SOLID STATE HIGH POWER AMPLIFIER

D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	FWD	Option-101 (With larger housing dimensions)
2	VVA	Option-103
3	CURRENT SENSOR	I_D@20mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	Enable = TTL High or Open; Disable = TTL Low or Short
6, 7	VDD	35VDC
8, 9	GND	Ground

OUTLINE DRAWING

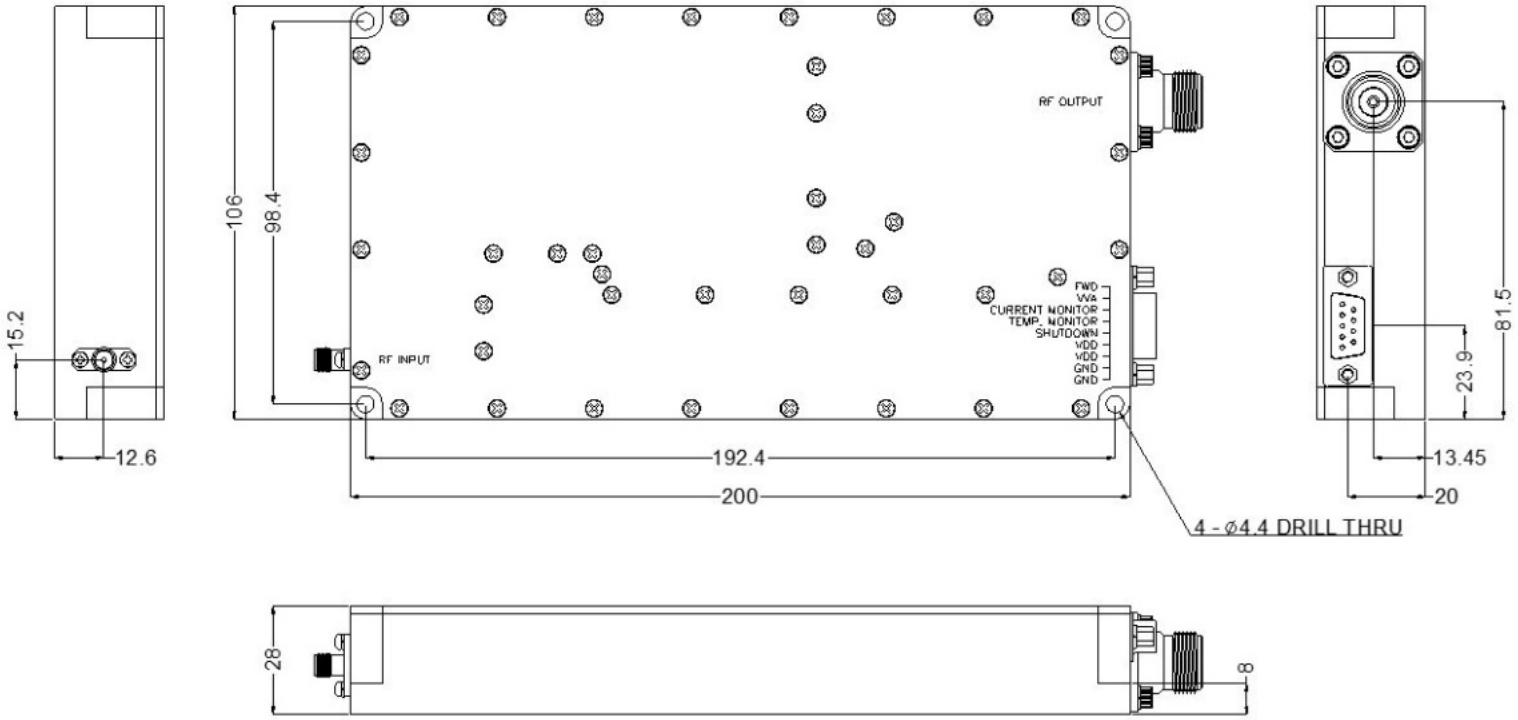

38 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.