HD33335
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear solid-state GaAsFET design
Instantaneous wide bandwidth
Small form factor and light weight
Suitable for all single channel modulation standards
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	26.5 - 40.0 GHz	
Power Output @ Psat	11 Watt Min / 13 Watt Typ	
Power Output @ P1dB	7 - 10 Watt Typ	10 Watt Typ >30 GHz
Power Gain	52 dB Min	
Power Gain Flatness	16 dB p-p Max	Constant input power
Input / Output Return Loss	-10 dB Max	Relative to 50 Ohm
Noise Figure	12 dB Max	
Harmonics	-30 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	9 VDC Nom	
Current Consumption	40 Amp Max / 32 Amp Typ	At rated Pout
Input Power Protection	-8 dBm Max	<10 Sec without damage
Load VSWR Protection	5 : 1 Max	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +65 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	140 x 150 x 27 mm	Excluding connectors
Weight	1.1 Kg.	
RF Connectors In/Out	2.92 mm K Type female	
DC Power / Interface Connector	7-Pin Hybrid D-Sub	
Cooling	External Heatsink	Forced air required


D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	N/C	Reserved
2	N/C	Reserved
3	CURRENT SENSOR	I_D@20mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	TTL
A1	VDD	8VDC
A2	GND	Ground

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD33335
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING

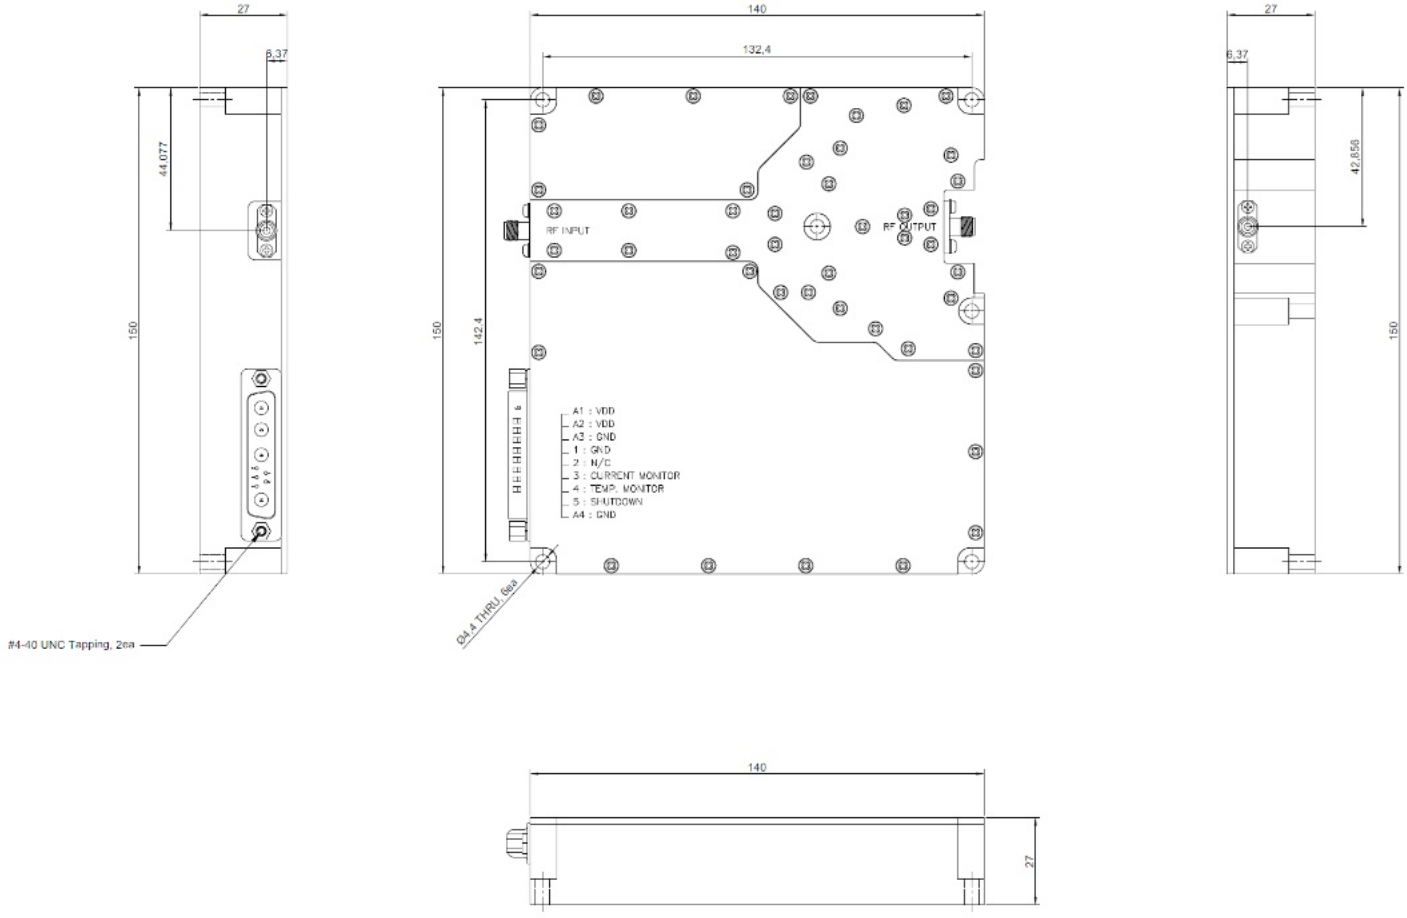

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com

Specifications subject to change without notice. Specifications and drawings may vary with selected options.