# HD33577
# SOLID STATE HIGH POWER AMPLIFIER

**FEATURES**

Designed for EMI/RFI, lab, CW/Pulse and all communication applications.
Small form factor, rack mounted system
Class A/AB Linear design
High power advanced technology devices
Instantaneous wide bandwidth
Built-in protection circuits, with extensive monitoring
Local LCD & remote flexible interfaces
High efficiency, with unprecedented reliability and ruggedness



**ELECTRICAL SPECIFICATIONS** : 50Ω, 25°C

| Parameter | Specification | Notes |
|---|---|---|
| Operating Frequency Range | 1.0 - 2.5 GHz | Functional down to 800 MHz |
| Power Output @ Psat | 350 Watt Min / 400 Watt Typ | CW or Pulse |
| Power Output @ P1dB | 100 Watt Typ | |
| Power Gain | 56 dB Min | 0dBm or less for Rated Power |
| Power Gain Flatness | 3.0 dB p-p Max | Constant input power |
| Gain Adjustment Range | >20 dB Typ | Local or remote capable |
| Input Return Loss | -10 dB Max | |
| 2-Tone Intermodulation (IMD) | -30 dBc Typ | 45dBm/Tone, Δ = 1MHz |
| Harmonics | -20 dBc Typ | At rated output |
| Spurious | -60 dBc Max | Non-harmonics |
| Operating Voltage | 100 - 240 VAC, | 50 - 60Hz |
| Power Consumption | 2500 Watt Max | At rated output |
| Input Power Protection | +8 dBm Max[1] | |
| Load VSWR Protection | 4 : 1: Max[2] | Foldback @ preset limit |
| Sample Port (optional) | -50 dB | N-Female |

1 Units with optional digital monitor and control, for basic units <10 Sec without damage
2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

**ENVIRONMENTAL CHARACTERISTICS**

| Parameter | Specification | Notes |
|---|---|---|
| Operating Ambient Temperature | 0 to +50 °C | |
| Storage Temperature | -40 to +85 °C | |
| Relative Humidity | up to 95 % | Non Condensing |
| Altitude | 3000 meters | |
| Shock & Vibration | Normal transport[3] | |

3 MIL Spec available for quotation

**MECHANICAL SPECIFICATIONS**

| Parameter | Specification | Notes |
|---|---|---|
| Dimensions W x H x D | 421 x 175 x 600 mm | 4U, excluding handles |
| Weight | 27 Kg. Max | |
| RF Conn. In / Out / Sample | N-Female | Front or rear panel |
| Interface Connector | 9-Pin D-Sub | Rear panel |
| AC Power | IEC 60320-C14 | Or equivalent |
| Cooling | Built-in forced air cooling | Variable speed |
| **OPTIONAL:** Digital Monitor & Control (DMC)<br>FWD, REV, VSWR, GAIN, ALC, V & I, TEMP,<br>Optional Safety Interlock (INT) | Ethernet RJ-45 TCP/IP, RS422/485, USB<br>Optional GPIB Interface<br>Open=STBY/Short=RFON | IEEE rear panel<br>BNC-F rear panel |

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.


# HD33577
# SOLID STATE HIGH POWER AMPLIFIER

**AVAILABLE SPECIAL OPTIONS**

| Parameter | Specification | Notes |
|---|---|---|
| Option FRS: Forward RF Sample | -50dB, Type N-Female | Front or rear panel |
| Option RRS: Reflected RF Sample | -40dB, Type N-Female | Front or rear panel |
| Option GPIB: GPIB remote control | GPIB IEEE-488 Remote capability | |
| **Included CPM:** Calibrated Power Monitoring (With purchase of Option DMC) | Offset correction entry for +/- 0.2dB accuracy | 7-points standard[4] |

4 Consult with the factory if additional points would be required.

## OUTLINE DRAWING
## SHOWN WITH LCD DIGITAL CONTROLLER

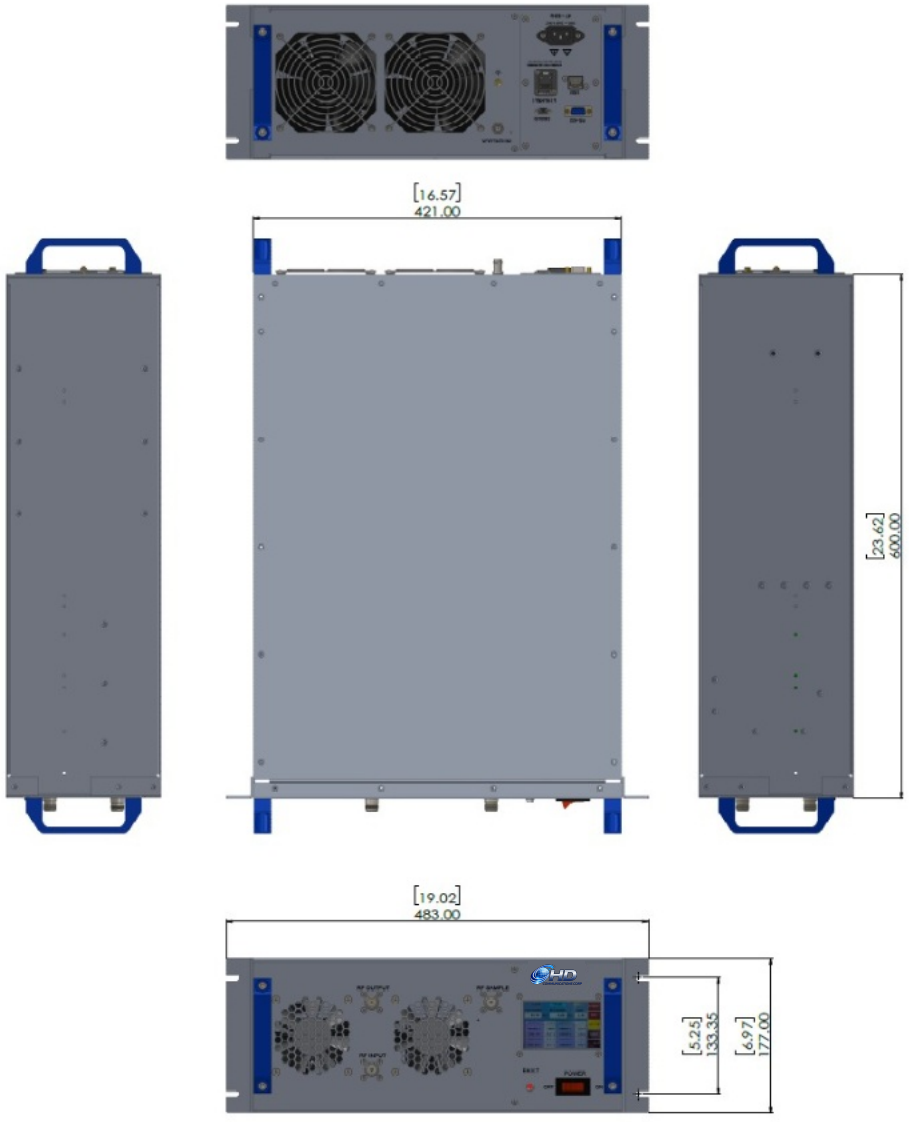


338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.