
HD33849
SOLID STATE HIGH POWER PULSE AMPLIFIER

FEATURES

Class AB linear high-power pulse GaN design
Designed for S-Band high power pulse applications
Built-in monitoring and protection circuits
High reliability and ruggedness
Optional built-in fast pulse modulator

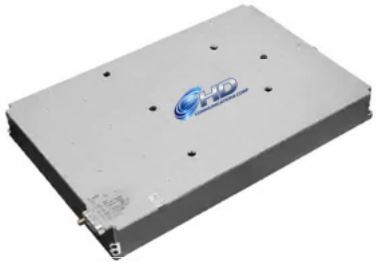

ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification			Notes	
Operating Frequency Range	2.0 - 3.5 GHz				
Power Output @ Pulse	1000 Watt Typ / 800 Watt Min			Peak Pulse	
Pulse Characteristics	**Width (tp)**	**Duty (δ)**	**Droop**	**Rise / Fall**	
	100 µS	5 %	<1.0 dB[1]	<75 nS Typ	
Switching Delay Time (Td)	200 nS Typ				
Power Gain	60 dB Nom			0dBm or less for rated Pout	
Power Gain Flatness	2.0 dB p-p Typ				
Input Return Loss	-12 dB Max				
Harmonics	-20 dBc Typ			At rated Pout	
Spurious	-65 dBc Max			Non-harmonics	
Operating Voltage	50 VDC Nom				
Current Consumption	10 Amp Avg / 100 Amp Peak Max			δ = 5%, tp = 100µS	
Input Power Protection	+5 dBm Max			<10 Sec without damage	
Load VSWR Protection	5 : 1 Max[2]			<1 minute at rated Pout	

1 Requires 10KuF Ext. Cap
2 Modules could be damaged due to excessive VSWR beyond 1 minute

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +75 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport[2]	

3 MIL Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	365 x 250 x 43 mm	Excluding connectors
Weight	6.5 Kg.	
RF Connectors In/Out	SMA Female / Type-N Female	
DC Power / Interface Connector	7-Pin Hybrid D-Sub	7W2
Cooling	External Heatsink	Forced air required


338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD33849
SOLID STATE HIGH POWER PULSE AMPLIFIER

D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
P1	PULSE TRIGGER	Enable = TTL "High" - Disable = Open or TTL "Low"
P2	GND	Ground
P3	CURRENT SENSOR	I_D@20mV/100mA Typ
P4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
P5	SHUTDOWN	Enable = TTL "High" - Disable = Open or TTL "Low"
A1	VDD	+50VDC
A2	GND	Ground

OUTLINE DRAWING

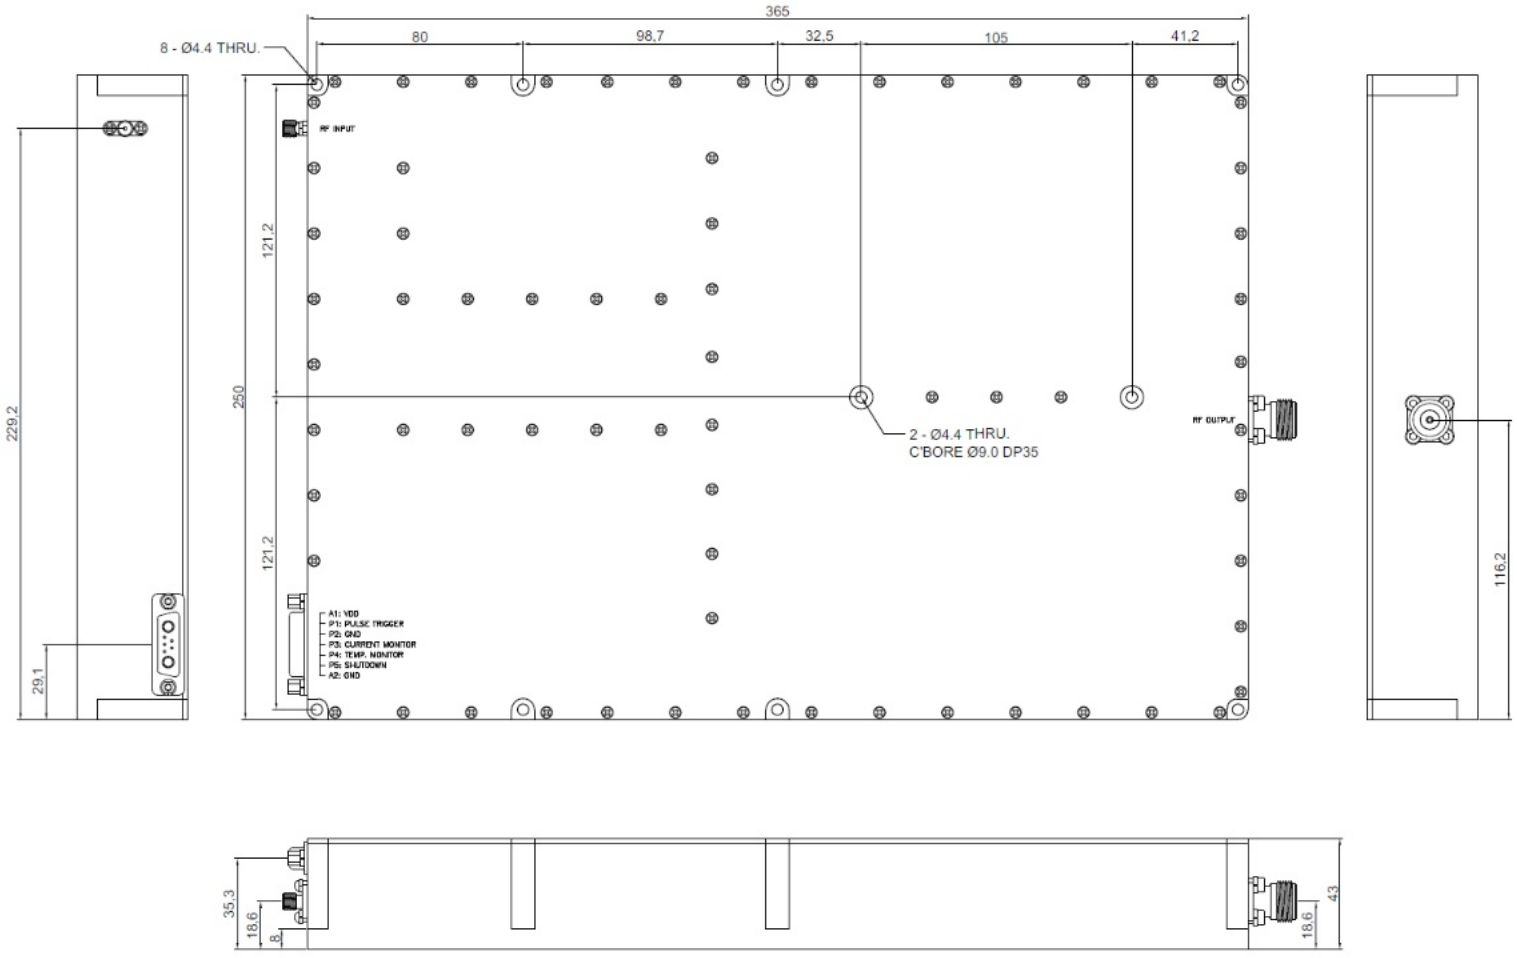

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com

Specifications subject to change without notice. Specifications and drawings may vary with selected options.