HD33940
SOLID-STATE HIGH-POWER AMPLIFIER

FEATURES

Designed for broadband EMI/RFI, Lab, GTEM and IEC Testing applications
Small form factor, rack mounted system
Class A/AB Linear design
High power advanced technology devices
Instantaneous ultra-wide bandwidth
Built-in protection circuits, with extensive monitoring
Local LCD & remote flexible interfaces
High efficiency, with unprecedented reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	1.0 - 6.0 GHz	
Power Output @ Psat	400 Watt Min / 500 Watt Typ	CW or Pulse
Power Output @ P1dB	250 Watt Min / 300 Watt Typ	
Power Gain	56 dB Min	0dBm or less for rated Pout
Power Gain Flatness	4 dB p-p Max	Constant input power
Gain Adjustment Range	20 dB Min	Local or remote capable
Input / Output Return Loss	-10 dB Max	
2-Tone Intermodulation (IMD)	-30 dBc Typ	46dBm/Tone, Δ = 1MHz
Harmonics	-20 dBc Typ	At rated output
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	200 - 240 VAC	50-60 Hz
Power Consumption	4000 Watt Max	At rated output
Input Power Protection	+8 dBm Max[1]	
Load VSWR Protection	4 : 1: Max[2]	Foldback @ preset limit
Sample Port Coupling (optional)	-50 dB	N-Female

1 Units with optional digital monitor and control, for basic units <10 Sec without damage
2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non Condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport[3]	

3 MIL Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	421 x 220 x 750 mm	6U, excluding handles
Weight	45 Kg.	Nominal
RF Connectors In/Out/Sample (optional)	N-Female/716-Female/N-Female	Front or rear panel
AC Power	IEC 60320-C14 / 9-Pin D-Sub	Or equivalent
Cooling: Built in Quiet-Cool	Close circuit Air-liquid cooling	
OPTIONAL: Digital Monitor & Control (DMC[4]) FWD, REV, VSWR, GAIN, ALC, V & I, TEMP, Optional Safety Interlock (INT)	Ethernet RJ-45 TCP/IP, RS422/485, USB Optional GPIB Interface Open=STBY/Short=RFON	IEEE rear panel BNC-F rear panel

4 Option DMC, LCD controller option may reduce output power by up to -0.75dB

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.


HD33940
SOLID-STATE HIGH-POWER AMPLIFIER

AVAILABLE SPECIAL OPTIONS

Parameter	Specification	Notes
Option FRS: Forward RF Sample	-50dB, Type N-Female	Front or rear panel
Option RRS: Reflected RF Sample	-40dB, Type N-Female	Front or rear panel
Option GPIB: GPIB remote control	GPIB IEEE-488 Remote capability	
Included CPM: Calibrated Power Monitoring (With purchase of Option DMC)	Offset correction entry for +/- 0.2dB accuracy	11-points standard[5]

5 Consult the factory if additional points are required

OUTLINE DRAWING
SHOWN WITH LCD DIGITAL CONTROLLER

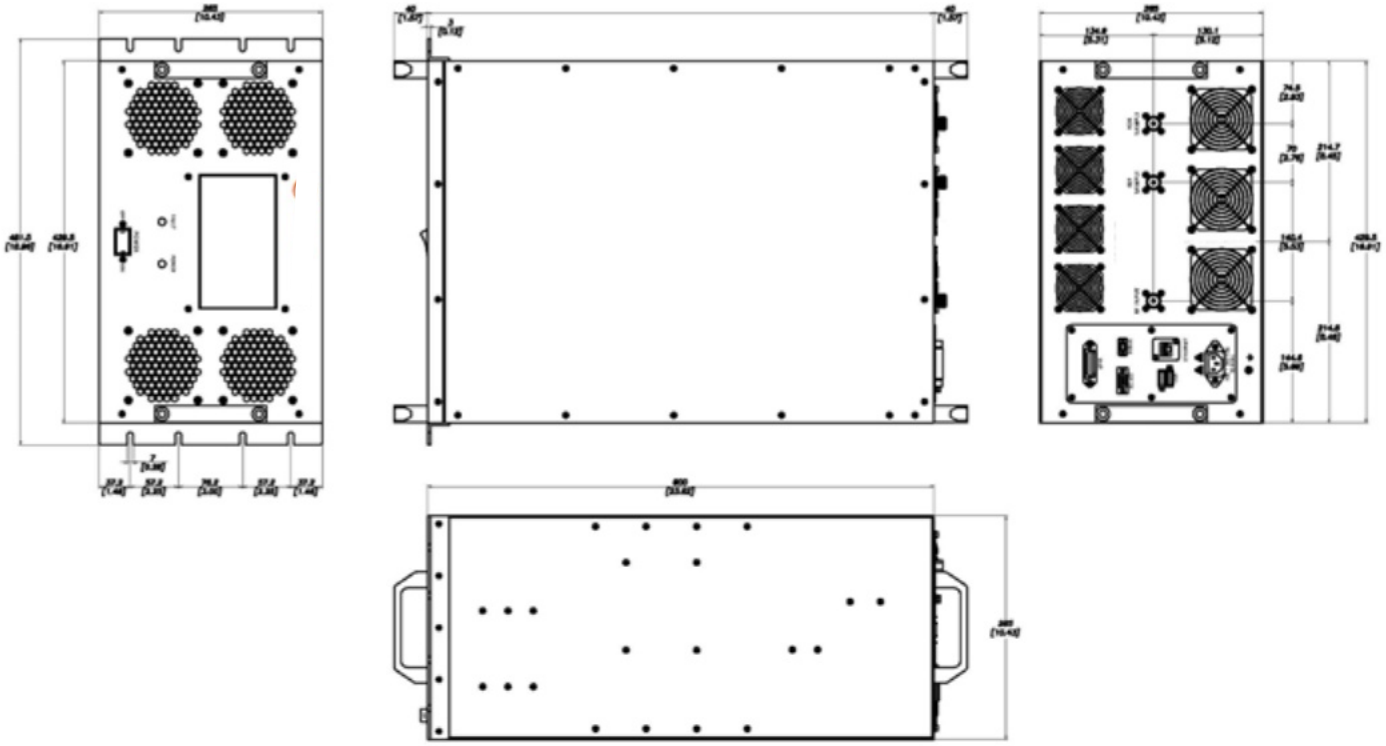

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.