HD35105
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Designed for EMC-EMI/RFI, Lab, and general comm applications
Small form factor, high power density
Class AB linear GaN design
Instantaneous ultra-wide bandwidth
Suitable for all single channel modulation standards
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 50 Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	0.4 - 6.0 GHz	
Power Output @ Psat	40 Watt Min	CW
Power Gain	46 dB Min	0dBm or less for rated Pout
Power Gain Flatness	4.0 dB p-p Max[1]	Constant input power
Input Return Loss	-10 dB Max	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	<-30 dBc Typ	36 dBm/Tone, Δ = 1 MHz
Harmonics 2nd	<-20 dBc Typ	At rated Pout
Harmonics 3rd	<-20 dBc Typ	At rated Pout
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	30 - 31 VDC Nom	
Current Consumption	12 Amp Max / <10 Amp Typ	At rated Pout
Input Power Protection	+8 dBm Max	<10 Sec without damage
Load VSWR Protection	5 : 1 Max	<1 minute at rated output

1. Output flatness typically higher over 400-700MHz
2. 2nd harmonics -10dBc or as low as -7dBc over 400-700MHz

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +75 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport[3]	

3. MIL-Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	230 x 106 x 27 mm	Excluding connectors
Weight	1.25 Kg.	
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required


338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.

HD35105
SOLID STATE HIGH POWER AMPLIFIER

D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	N/C	N/C
2	N/C	N/C
3	CURRENT SENSOR	I_D@20mV/100mA Typ
4	TEMP SENSOR	V_T@10mV/°C + 500mV Typ
5	SHUTDOWN	Enable = TTL High or Open; Disable = TTL Low or Short
6, 7	VDD	30VDC
8, 9	GND	Ground

OUTLINE DRAWING

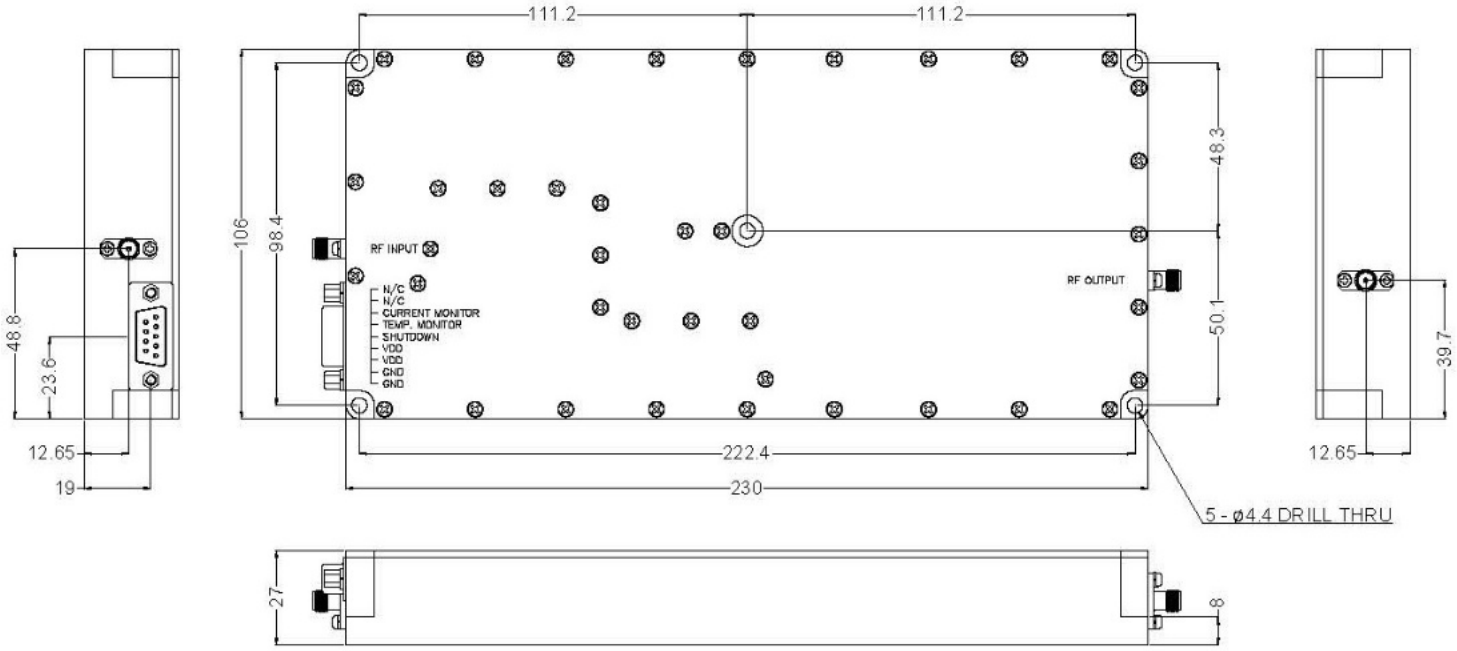

338 Jericho Turnpike, Suite 387, Syosset NY, 11791 (631)-588-3877
www.rfamplifiers.com sales@hdcom.com. www.rfcomp.com
Specifications subject to change without notice. Specifications and drawings may vary with selected options.