# HD35124
# SOLID STATE HIGH POWER AMPLIFIER

**FEATURES**

Designed for EMI/RFI, lab, CW/Pulse and all communication applications.
Small form factor, rack mounted system
Class A/AB Linear design
High power advanced technology devices
Instantaneous ultra-wide bandwidth
Built-in protection circuits, with extensive monitoring
Local LCD & remote flexible interfaces
High efficiency, with unprecedented reliability and ruggedness



**ELECTRICAL SPECIFICATIONS** : 50Ω, 25°C

| Parameter | Specification | Notes |
|---|---|---|
| Operating Frequency Range | 20 - 1000 MHz | |
| Power Output @ Psat | 125 Watt Min | CW or Pulse |
| Power Output @ P1dB | 80 Watt Min | |
| Power Gain | 51 dB Min | 0dBm or less for rated Pout |
| Power Gain Flatness | 4.0 dB p-p Max | Constant input power |
| Gain Adjustment Range | >20 dB Typ | Local or remote capable |
| Input Return Loss | -10 dB Max | |
| 2-Tone Intermodulation (IMD) | -30 dBc Typ | 41dBm/Tone, Δ = 1MHz |
| Harmonics | -20 dBc Typ | At rated output power |
| Spurious | -60 dBc Max | Non-harmonics |
| Operating Voltage | 100 - 240 VAC | 50 - 60Hz |
| Power Consumption | 1200 Watt Max | At rated output |
| Input Power Protection | +10 dBm Max[1] | |
| Load VSWR Protection | 4 : 1: Max[2] | Foldback @ preset limit |
| Sample Port (optional) | -50 dB | N-Female |

1 Units with optional digital monitor and control, for basic units <10 Sec without damage
2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

**ENVIRONMENTAL CHARACTERISTICS**

| Parameter | Specification | Notes |
|---|---|---|
| Operating Ambient Temperature | 0 to +50 °C | |
| Storage Temperature | -40 to +85 °C | |
| Relative Humidity | up to 95 % | Non Condensing |
| Altitude | 3000 meters | |
| Shock & Vibration | Normal transport[3] | |

3 MIL Spec available for quotation

**MECHANICAL SPECIFICATIONS**

| Parameter | Specification | Notes |
|---|---|---|
| Dimensions W x H x D | 481 x 133 x 600 mm | 3U, excluding connectors |
| Weight | 18 kg. | |
| RF Conn. In / Out / Sample (optional) | Type-N Female | Front or rear panel |
| AC Power / Interface Connector | IEC 60320-C14 / 9-Pin D-Sub | Rear panel |
| Cooling | Built in Fan Cooling | Variable speed |
| **STANDARD:** Digital Monitor & Control<br>FWD, REV, VSWR, GAIN, ALC, V & I, TEMP,<br>**OPTIONAL**: Safety Interlock | Ethernet RJ-45 TCP/IP, RS422/485, USB<br><br>Open=STBY/Short=RFON | <br><br>BNC Female on rear panel |

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.


# HD35124
# SOLID STATE HIGH POWER AMPLIFIER

**AVAILABLE SPECIAL OPTIONS**

| Parameter | Specification | Notes |
|---|---|---|
| Option FRS: Forward RF Sample | -50dB, Type N-Female | Front or rear panel |
| Option RRS: Reflected RF Sample | -50dB, Type N-Female | Front or rear panel |
| Option GPIB: GPIB remote control | GPIB IEEE-488 Remote capability | |
| **Included CPM:** Calibrated Power Monitoring (With purchase of Option DMC) | Offset correction entry for +/- 0.2dB accuracy | 11-points standard[4] |

4 Consult the factory if additional points are required.

## OUTLINE DRAWING
## SHOWN WITH OPTIONAL LCD DIGITAL CONTROLLER

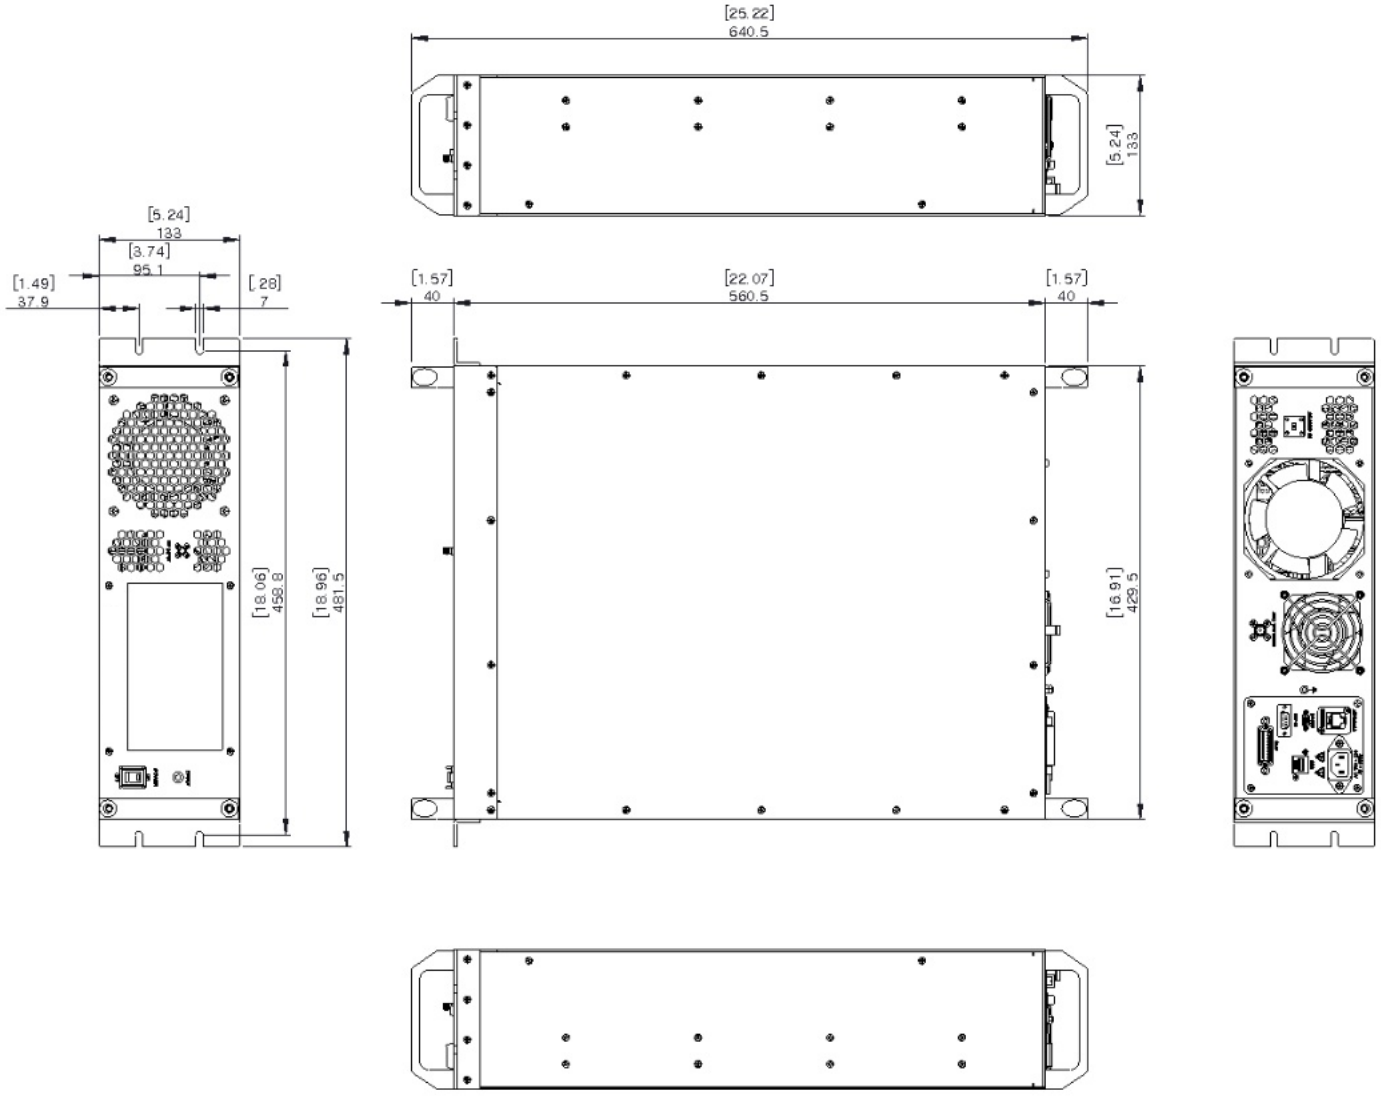




338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com



Specifications subject to change without notice.
Specifications and drawings may vary with selected options.

# HD35124
# SOLID STATE HIGH POWER AMPLIFIER

## OUTLINE DRAWING
## MANUAL GAIN ADJUSTMENT

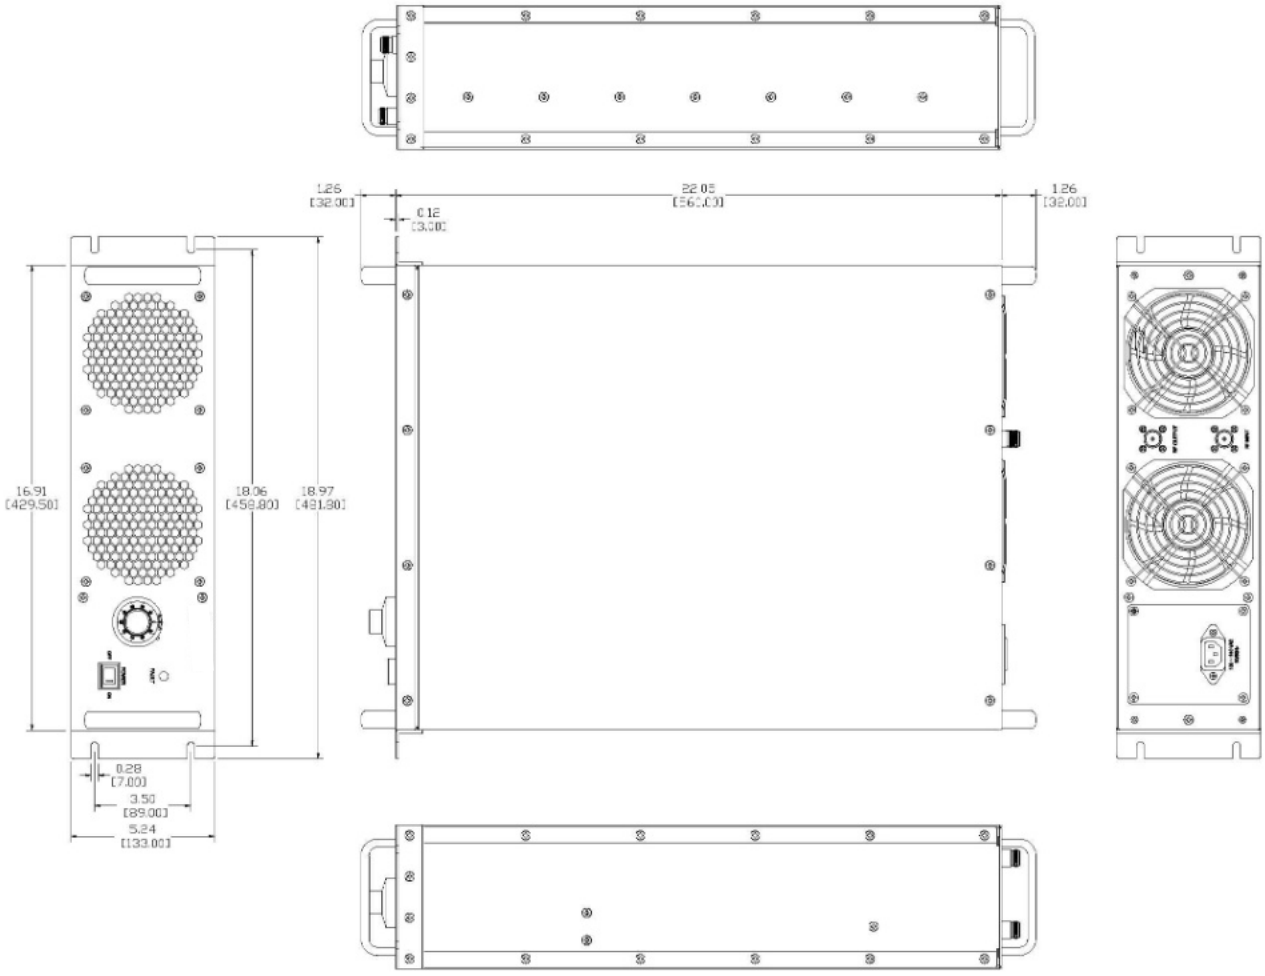


338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.