HD35136
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Rack mounted system
Class AB linear LDMOS design
Instantaneous ultra-wide bandwidth
Designed for broadband EMI/RFI, Lab, Comm. and EW applications
Suitable for CW, pulse and all single channel modulation standards
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	500 - 1000 MHz	
Power Output	200 Watt Min	CW
Power Output @ P1dB GCP	150 Watt Typ	
Power Gain	53 dB Min	
Power Gain Flatness	3.0 dB p-p Max	Constant input power
Input Return Loss	-10 dB Max	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-20 dBc Typ	43dBm/Tone, Δ = 1MHz
Harmonics	-20 dBc Typ	At rated output power
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	100 - 240 VAC	50 - 60Hz
Power Consumption	1000 Watt Max	At rated output
Input Power Protection	+3 dBm Max	
Load VSWR Protection	5 : 1 Max	Foldback @ preset limit

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50°C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS


Parameter	Specification	Notes
Dimensions W x H x D	421 x 131 x 600 mm	3U, excluding handles
Weight	20 kg.	
RF Connectors In/Out	Type-N Female	Front or rear panel
AC Power / Interface Connector	IEC 60320-C14 / 9-Pin D-Sub	
Cooling	Built in Fan Cooling	Variable speed
OPTIONAL: Digital Monitor & Control FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	Ethernet RJ-45 TCP/IP, RS422/485, USB Optional GPIB Interface	Optional Remote Bluetooth application

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.

HD35136
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING
OPTIONAL LCD DIGITAL CONTROLLER

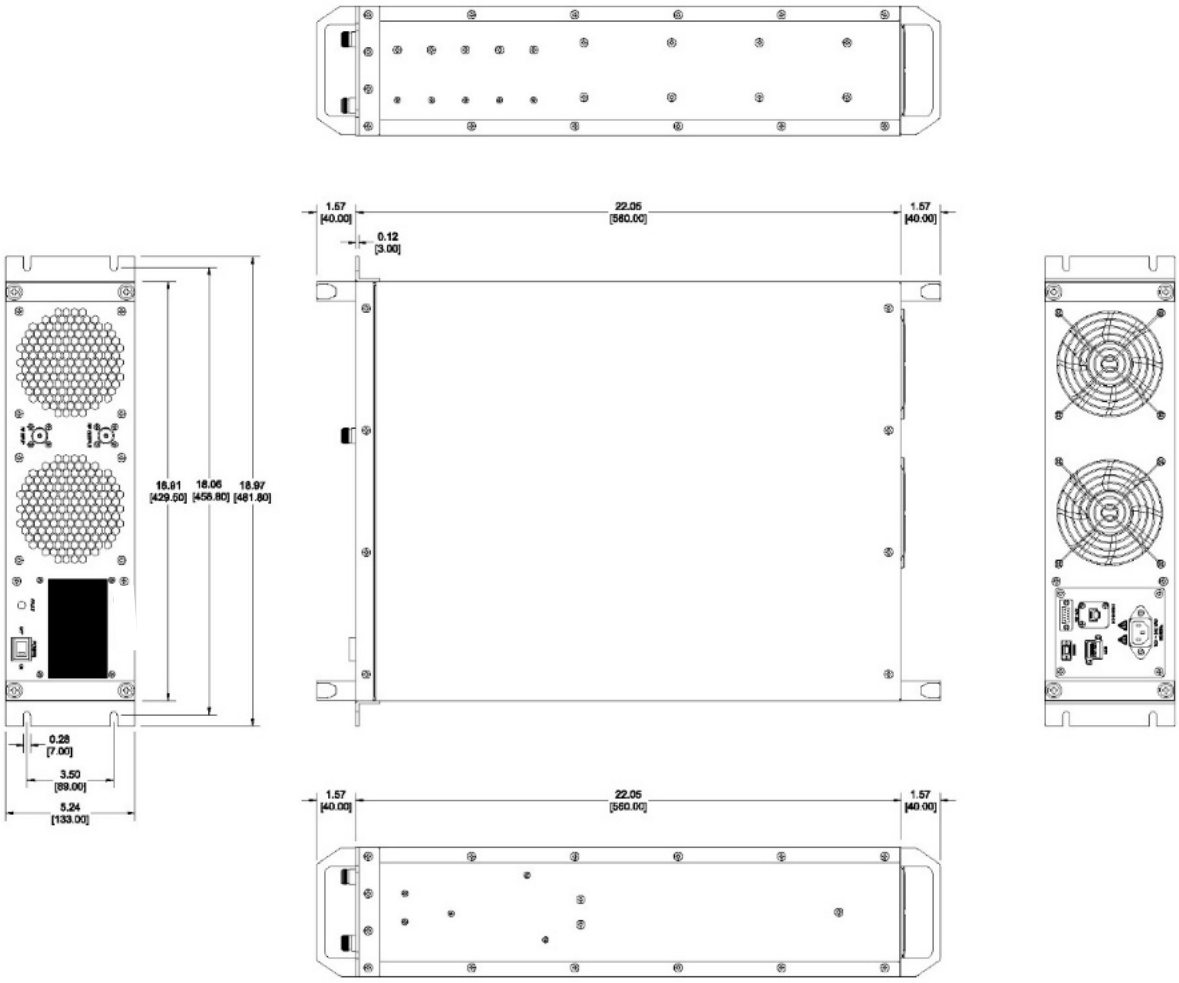


338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.

HD35136
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING
MANUAL GAIN ADJUSTMENT

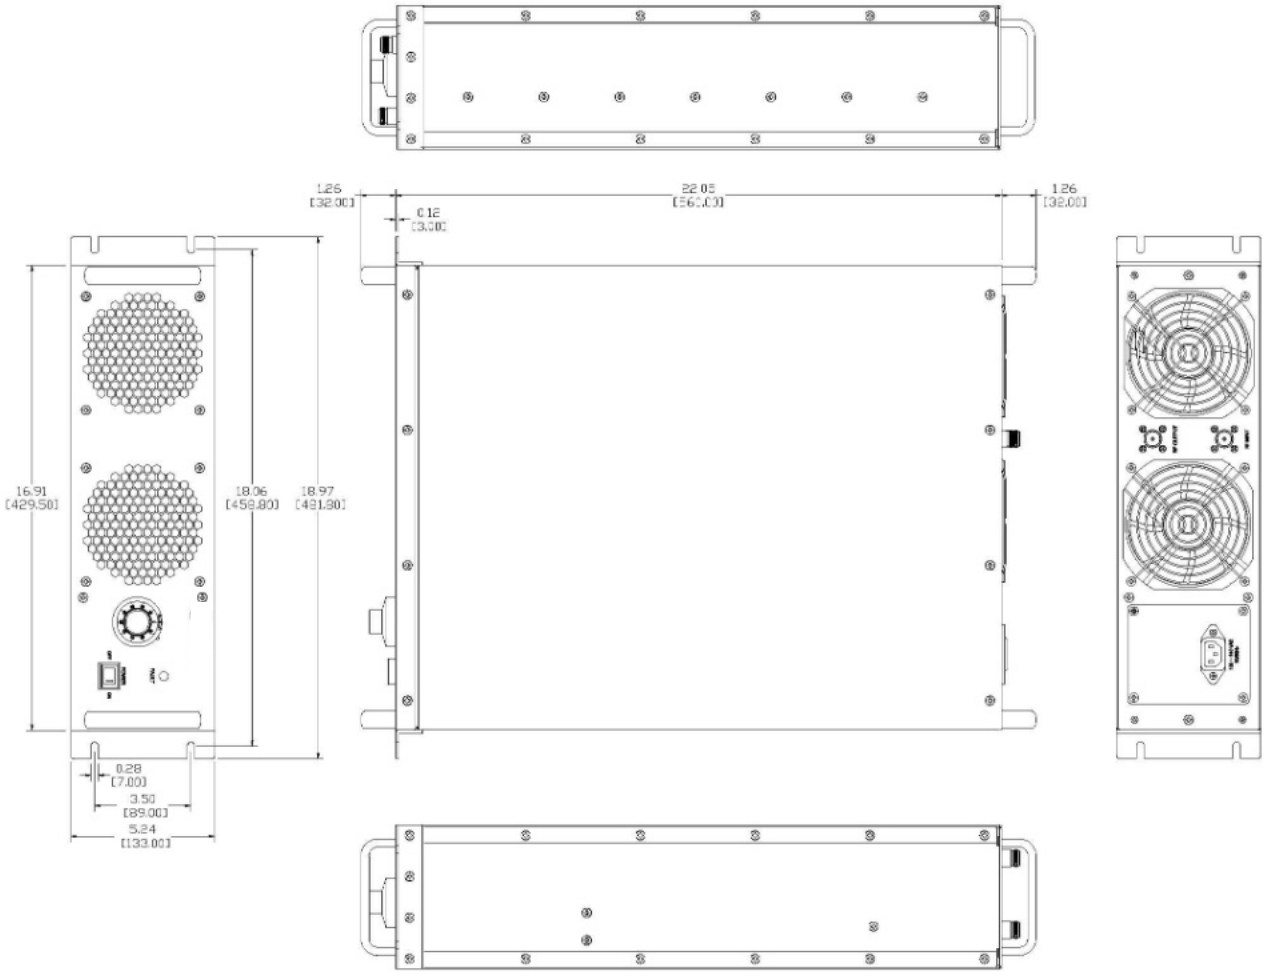

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.