HD35139
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Small form factor rack-mounted system
Class AB linear Advanced technology design
Instantaneous L-Band octave bandwidth
Linear high peak pulse applications
Designed for EMI/RFI, lab, HIRF/Pulse applications
Built-in protection circuits with extensive monitoring
Local LCD & remote flexible interfaces
High efficiency with unprecedented reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification			Notes	
Operating Frequency Range	1.0 - 2.0 GHz				
Power Output @ Peak Pulse	4.0 KW Min				
Input Pulse Characteristics	**Width**	**Duty**	**PRF**	**Rise/Fall**	**Droop**
	up to 100 µS	6 % Max	up to 100 KHz	<50ns Typ	<1 dB
Power Gain	66dB Min			0dBm or less for rated Pout	
Power Gain Flatness	2.0dB p-p Max			Constant input power	
Gain Adjustment Range	20 dB Min				
Input Return Loss	-10 dB Max				
Output Power On/Off Ratio	-80 dB Min			TTL Gate Control	
Harmonics	-20 dBc Typ			At rated output power	
Spurious	-60 dBc Max			Non-harmonics	
Operating Voltage	100 - 240 VAC			50 - 60Hz	
Power Consumption	1.5 KW Max			At rated output	
Input Power Protection	+8 dBm Max[1]				
Load VSWR Protection	4 : 1: Max[2]			Foldback @ preset limit	
Sample Port (optional)	-60 dB			N-Female	

1 Units with optional digital monitor and control, for basic units <10 Sec without damage
2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50°C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport[3]	

3 MIL Spec available for quotation


MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	421 x 442 x 600 mm	10U, excluding handles
Weight	45 kg.	
RF Connectors In/Out/Sample	N-Female/ SC-Female / N-Female	Front or rear panel
Gate Control	BNC Female	Front panel
AC Power / Interface Connector	IEC60320-14 / D-Sub 9-Pins	Or equivalent
Cooling	Built in Fan Cooling	Variable speed
OPTIONAL: Digital Monitor & Control (DMC) FWD, REV, VSWR, GAIN, ALC, V & I, TEMP, Optional Safety Interlock (INT)	Ethernet RJ-45 TCP/IP, RS422/485, USB Optional GPIB Interface Open=STBY/Short=RFON	IEEE rear panel BNC-F rear panel

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com
Specifications subject to change without notice.
Specifications and drawings may vary with selected options.

HD35139
SOLID STATE HIGH POWER AMPLIFIER

OUTLINE DRAWING
10U

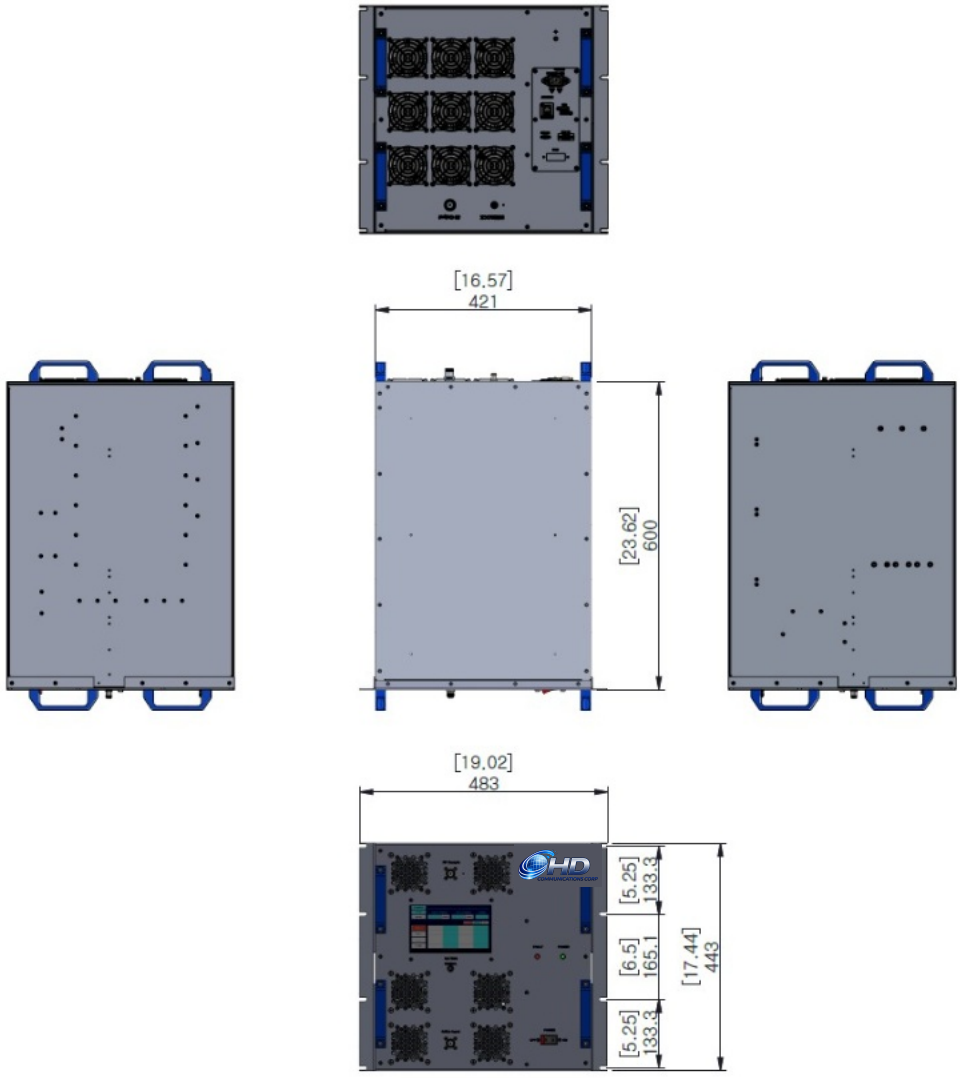

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.