HD35161
SOLID STATE HIGH POWER PULSE AMPLIFIER

FEATURES

Designed for EMI/RFI, lab, HIRF/Pulse applications
Small form factor rack-mounted system
Class AB linear advanced technology design
Instantaneous C-Band octave bandwidth
Linear high peak pulse applications
Built-in protection circuits with extensive monitoring
Local LCD & remote flexible interfaces
High efficiency with unprecedented reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification			Notes	
Operating Frequency Range	4.0 - 8.0 GHz				
Power Output @ Pulse	3500 Watt Typ			Peak Pulse	
Input Pulse Characteristics	**Width**	**Duty**	**PRF**	**Rise/Fall**	**Droop**
	up to 150 µS	10 % Max	up to 100 KHz	<50 nS Typ	<1 dB
Power Gain	65 dB Min			0dBm or less for rated Pout	
Power Gain Flatness	3.0 dB p-p Max			Constant input power	
Gain Adjustment Range	20 dB Min			Local or remote capable	
Input Return Loss	-10 dB Max				
Output Power On/Off Ratio	-80 dB Max			TTL Gate Control	
Harmonics	-20 dBc Typ			At rated output power	
Spurious	-60 dBc Max			Non-harmonics	
Operating Voltage	120/208, 3-Ph, 47 - 63 Hz			Opt: 230/400VAC, 3-Ph	
Power Consumption	5.0 KW Max / 3.5 KW Typ			At 10% & rated Pout	
Input Power Protection	+3 dBm Max[1]				
Load VSWR Protection	4 : 1: Max[2]			Foldback @ preset limit	
Sample Port (optional)	-60 dB			N-Female	

1 Units with optional digital monitor and control, for basic units <10 Sec without damage
2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	-30 to +50°C[4]
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport[3]	

3 MIL Spec available for quotation
4 Option ETR, extended temp range

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	421 x 442 x 750 mm	10U, excluding handles
Weight	45 kg.	
RF Connectors In/Out/Sample (optional)	N-Female/ SC-Female / N-Female	Front or rear panel
Gate Control	BNC Female	Front panel
AC Power / Interface Connector	MS / D-Sub 9-Pins	Or equivalent (rear panel)
Cooling	Built in Fan Cooling	Variable speed
OPTIONAL: Digital Monitor & Control (DMC) FWD, REV, VSWR, GAIN, ALC, V & I, TEMP, Optional Safety Interlock (INT)	Ethernet RJ-45 TCP/IP, RS422/485, USB Optional GPIB Interface Open=STBY/Short=RFON	IEEE rear panel BNC-F rear panel

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.


HD35161
SOLID STATE HIGH POWER PULSE AMPLIFIER

AVAILABLE SPECIAL OPTIONS

Parameter	Specification	Notes
Option OCC: Outdoor Cabinet Configuration	Outdoor Weatherproof Cabinet	NEMA-4 Style
Option FRS: Forward RF Sample	-60dB, Type N-Female	Front or rear panel
Option RRS: Reflected RF Sample	-50dB, Type N-Female	Front or rear panel
Option ETR: Extended Temperature Range	-30 °C to +50 °C	Storage (-40 °C to +85 °C)
Option GPIB: GPIB remote control	GPIB IEEE-488 Remote capability	
Included CPM: Calibrated Power Monitoring (With purchase of Option DMC)	Offset correction entry for +/- 0.2dB accuracy	9-points standard[5]

5 Consult the factory if additional points are required.

OUTLINE DRAWING
SHOWN WITH LCD DIGITAL CONTROLLER

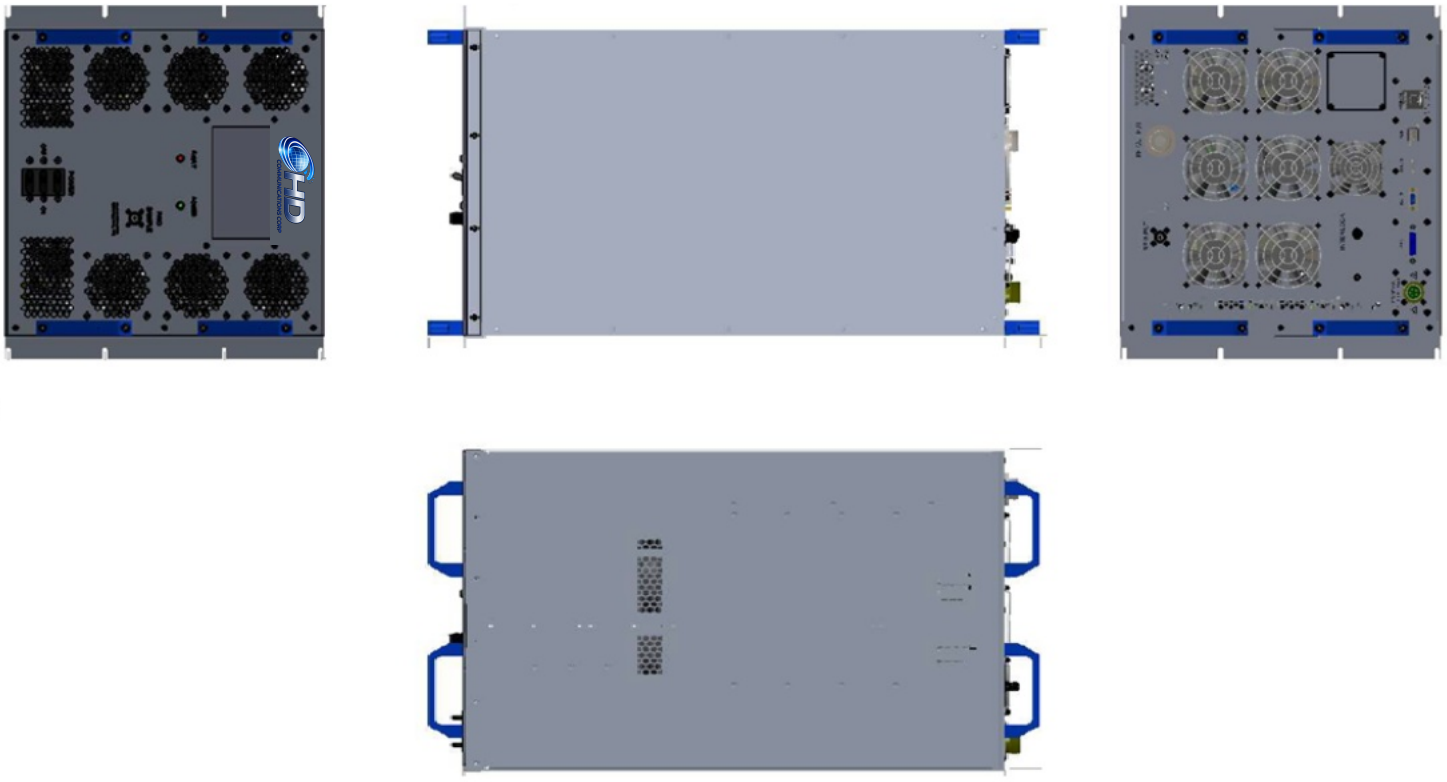

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.