HD35191
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Designed for EMI/RFI, lab, CW/Pulse and all communication applications
Small form factor, rack mounted system
Class A/AB Linear design
High Power Advanced technology devices
Instantaneous ultra-wide bandwidth
Built-in protection circuits, with extensive monitoring
Local LCD & remote flexible interfaces
High efficiency, with unprecedented reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 25°C, 50Ω

Parameter	Specification		Notes
Band	A	B	
Operating Frequency Range	10 kHz - 200 MHz	100 - 400 MHz	Band switching @ 15 mS Typ
Power Output @ Psat	350 Watt Min		Less than 0dBm for rated Pout
Power Output @ P1dB	200 Watt Typ		
Power Gain	56 dB Min		
Power Gain Flatness	3 dB p-p Max		Constant input power
Gain Adjustment Range	20 dB Min		Local or remote capable
Input / Return Loss	-10 dB Max		
2-Tone Intermodulation (IMD)	-30 dBc Typ		46 dBm/Tone, Δ = 1 MHz
Harmonics	-20 dBc Typ		At rated output power
Spurious	-60 dBc Max		Non-harmonics
Operating Voltage	180 - 240 VAC		50-60Hz
Power Consumption	3000 Watt Max		At rated output
Input Power Protection	+8 dBm Max[1]		
Load VSWR Protection	4 : 1: Max[2]		Foldback @ preset limit
Sample Port Coupling (optional)	-50 dB		N-Female

1 Units with optional digital monitor and control, for basic units <10 Sec without damage
2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non Condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport[3]	

3 MIL Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	421 x 353 x 750 mm	8U - excluding handles
Weight	47 Kg.	
RF Connectors Input/Output/ Sample (optional)	N-Female	Front or rear panel
Interface Connector	9-Pin D-Sub	Rear panel
AC Power	IEC 60320-C14	Or equivalent
Cooling	Built in Fan Cooling	Variable speed
OPTIONAL: Digital Monitor & Control (DMC) FWD, REV, VSWR, GAIN, ALC, V & I, TEMP, Optional Safety Interlock (INT)	Ethernet RJ-45 TCP/IP, RS422/485, USB Optional GPIB Interface Open=STBY/Short=RFON	IEEE rear panel BNC-F rear panel

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.


HD35191
SOLID STATE HIGH POWER AMPLIFIER

AVAILABLE SPECIAL OPTIONS

Parameter	Specification	Notes
Option FRS: Forward RF Sample	-50dB, Type N-Female	Front or rear panel
Option RRS: Reflected RF Sample	-50dB, Type N-Female	Front or rear panel
Option GPIB: GPIB remote control	GPIB IEEE-488 Remote capability	
Included CPM: Calibrated Power Monitoring (With purchase of Option DMC)	Offset correction entry for +/- 0.2dB accuracy	9-points standard[4]

4 Consult with factory if additional points would be required

OUTLINE DRAWING
SHOWN WITH LCD DIGITAL CONTROLLER

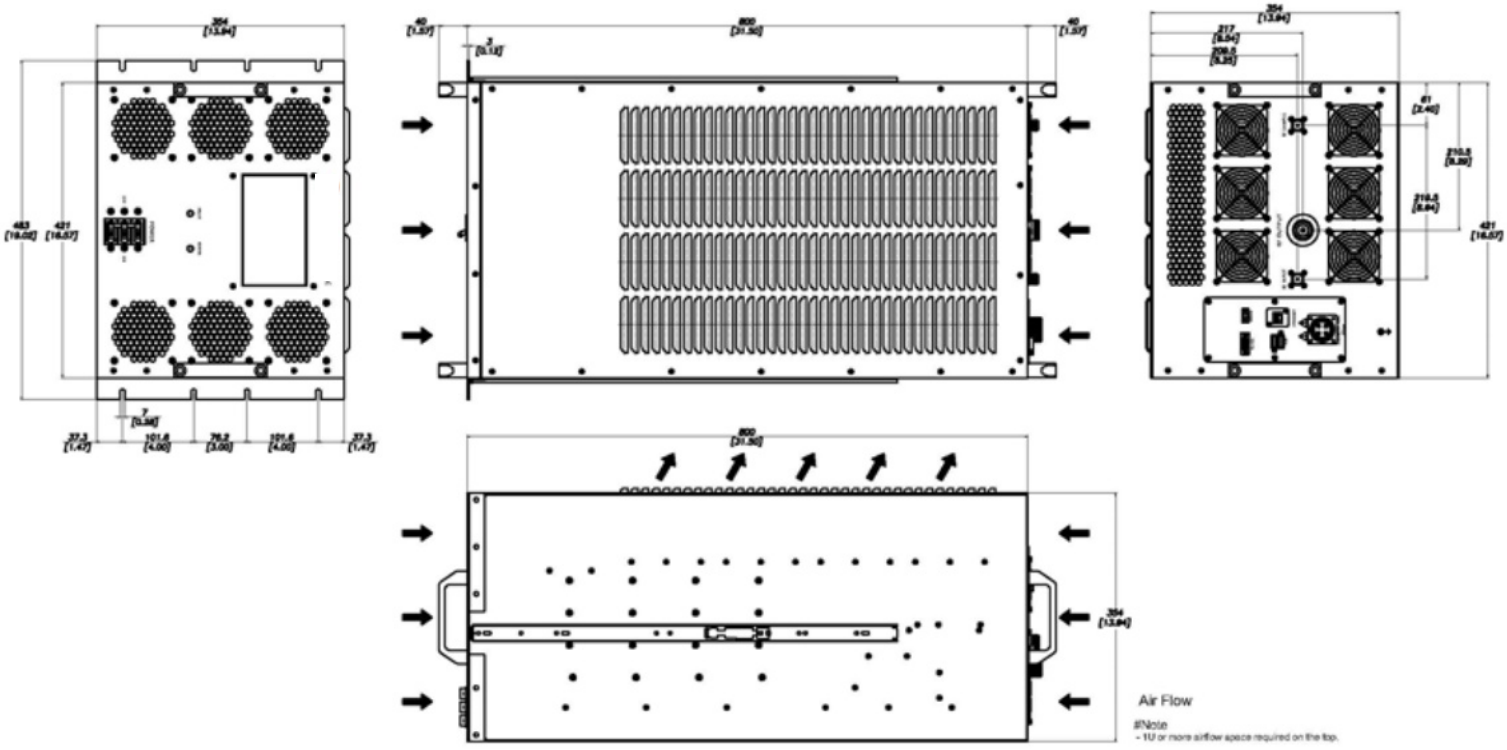

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.