# HD35197
# SOLID STATE HIGH POWER AMPLIFIER

**FEATURES**

Designed for broadband EMI/RFI, Lab, Comm., and EW applications
Small form factor, rack mounted system
Class A/AB Linear design
High Power Advanced technology devices
Instantaneous ultra-wide bandwidth
Built-in protection circuits, with extensive monitoring
Local LCD & remote flexible interfaces
High efficiency, with unprecedented reliability and ruggedness



**ELECTRICAL SPECIFICATIONS** : 25°C, 50Ω

| Parameter | Specification | | Notes |
|---|---|---|---|
| Band | A | B | Band switching @ 15 mS Typ |
| Operating Frequency Range | 1 - 1000 MHz | 1.0 - 3.0 GHz | |
| Power Output @ Psat | 100 Watt Min | 50 Watt Min | CW |
| Power Output @ P1dB | >50 Watt Typ | >25 Watt Typ | |
| Power Gain | 50 dB Min | 47 dB Min | 0dBm or less for rated Pout |
| Power Gain Flatness | 4 dB p-p Max | | Constant input power |
| Gain Adjustment Range | 20 dB Min | | Local or remote |
| Input Return Loss | -10 dB Max | | |
| 2-Tone Intermodulation (IMD) | -30 dBc Typ | | 37dBm/Tone, Δ = 1MHz |
| Harmonics | -20 dBc Typ | | At rated Pout |
| Spurious | -60 dBc Max | | Non-harmonics |
| Operating Voltage | 100 - 240 VAC | | 47-63 Hz |
| Power Consumption | 1000 Watt Max | | At rated Pout |
| Input Power Protection | +10 dBm Max[1] | | |
| Load VSWR Protection | 4 : 1: Max[2] | | Foldback @ preset limit |

1 Units with optional digital monitor and control, for basic units <10 Sec without damage
2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

**ENVIRONMENTAL CHARACTERISTICS**

| Parameter | Specification | Notes |
|---|---|---|
| Operating Ambient Temperature | 0 to +50 °C | |
| Storage Temperature | -40 to +85 °C | |
| Relative Humidity | up to 95 % | Non Condensing |
| Altitude | 3000 meters | |
| Shock & Vibration | Normal transport[3] | |

3 MIL Spec available for quotation

**MECHANICAL SPECIFICATIONS**

| Parameter | Specification | Notes |
|---|---|---|
| Dimensions W x H x D | 483 x 177 x 560 mm | 4U, excluding handles |
| Weight | 25 Kg. Nom | |
| RF Connectors In/Out/Sample (optional) | Type-N Female | Front or rear panel |
| AC Power / Interface Connector | IEC 60320-C14 / 9-Pin D-Sub | Or equivalent |
| Air-Cooling | Built in Fan Cooling | Variable speed |
| **STANDARD:** Digital Monitor & Control[4]<br>FWD, REV, VSWR, GAIN, ALC, V & I, TEMP,<br>**OPTIONAL**: Safety Interlock | Ethernet RJ-45 TCP/IP, RS422/485, USB<br><br>Open=STBY/Short=RFON | <br><br>BNC Female on rear panel |

4 DMC option may reduce Pout by 1dB.

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
**www.rfamplifiers.com sales@hdcom.com www.rfcomp.com**
Specifications subject to change without notice.
Specifications and drawings may vary with selected options.


# HD35197
# SOLID STATE HIGH POWER AMPLIFIER

**AVAILABLE SPECIAL OPTIONS**

| Parameter | Specification | Notes |
|---|---|---|
| Option FRS: Forward RF Sample | -50dB, Type N-Female | Front or rear panel |
| Option RRS: Reflected RF Sample | -40dB, Type N-Female | Front or rear panel |
| Option GPIB: GPIB remote control | GPIB IEEE-488 Remote capability | |
| **Included CPM:** Calibrated Power Monitoring (With purchase of Option DMC) | Offset correction entry for +/- 0.2dB accuracy | 11-points standard[5] |

5 Consult with factory if additional points would be required

## OUTLINE DRAWING
## SHOWN WITH LCD DIGITAL CONTROLLER

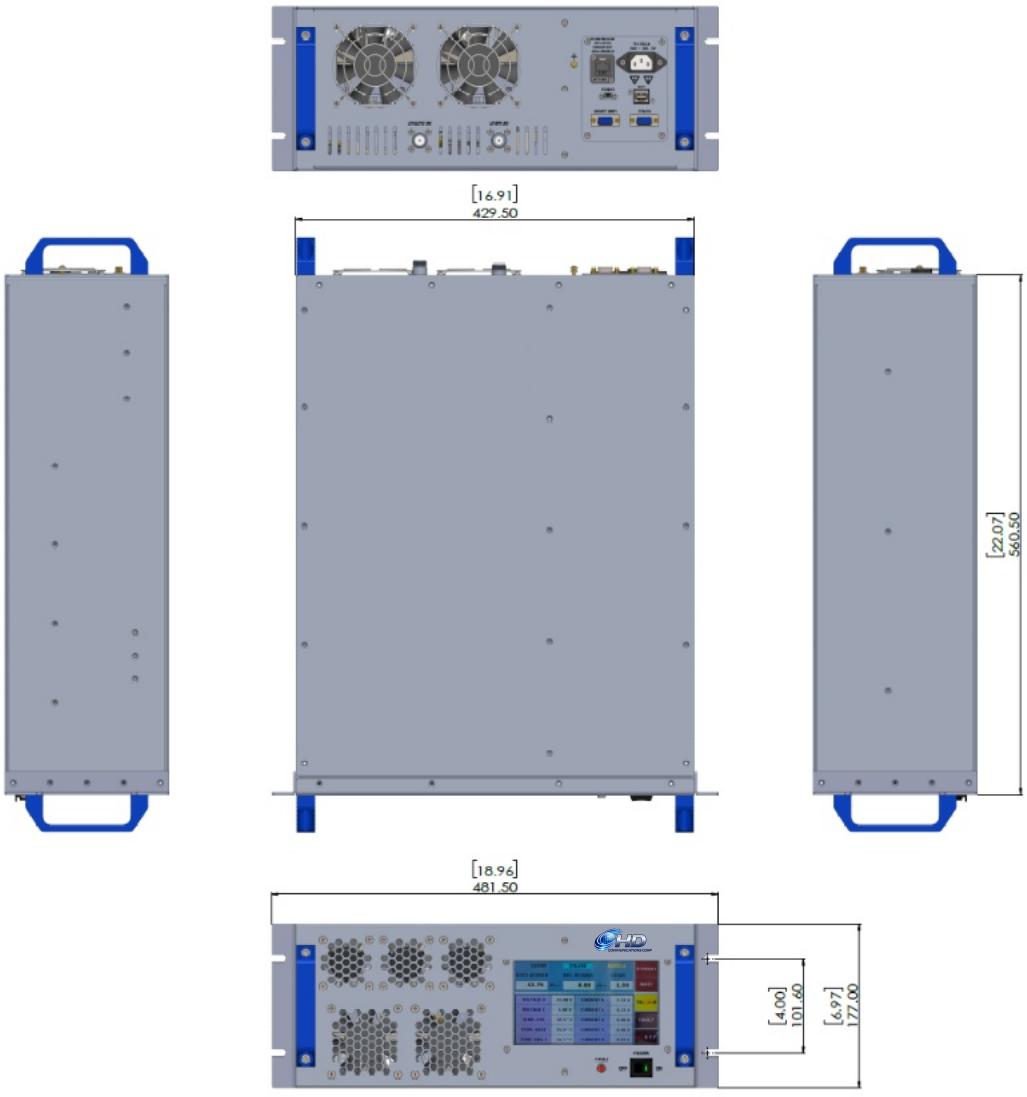


338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
**www.rfamplifiers.com sales@hdcom.com www.rfcomp.com**

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.