HD35232
SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Designed for EMI/RFI, lab, CW/Pulse and all EW communication applications
Small form factor, rack mounted system
Class A/AB Linear design
High power advanced technology devices
Instantaneous ultra-wide bandwidth
Built-in protection circuits, with extensive monitoring
Local LCD & remote flexible interfaces
High efficiency, with unprecedented reliability and ruggedness



ELECTRICAL SPECIFICATIONS : 50Ω, 25°C

Parameter	Specification	Notes
Operating Frequency Range	18.0 - 26.5 GHz	
Power Output @ Psat	200 Watt Min	CW or Pulse
Power Output @ P1dB	40 Watt Typ	
Power Gain	53 dB Min	0dBm or less for rated Pout
Power Gain Flatness	4.0 dB p-p Typ	Constant input power
Gain Adjustment Range	20 dB Min	Local or remote capable
Input / Output Return Loss	-10 dB Max	
2-Tone Intermodulation (IMD)	-30 dBc Typ	43dBm/Tone, Δ = 1MHz
Harmonics	-20 dBc Typ	At rated output power
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	120/208 VAC, 3-Ph, 47 - 63 Hz	Opt: 230/400VAC, 3-Ph
Power Consumption	5000 Watt Max	At rated Pout
Input Power Protection	+3 dBm Max[1]	
Load VSWR Protection	4 : 1: Max[2]	Foldback @ preset limit
Sample Port (optional)	-50 dB	2.9mm K-Female

1 Units with optional digital monitor and control, for basic units <10 Sec without damage
2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport[3]	

3 MIL Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	421 x 397 x 950 mm	9U, excluding connectors
Weight	45 Kg. Typ	
RF Conn. In / Out / Sample (optional)	(2.92) K-Female / WR42 / (2.92) K-Female	Rear panel
Interface Connector	9-Pin D-Sub	Rear panel
AC Power	IEC 60320-C14	Or equivalent
Cooling: Built in Quiet-Cool	Close circuit Air-liquid cooling	
OPTIONAL: Digital Monitor & Control (DMC) FWD, REV, VSWR, GAIN, ALC, V & I, TEMP, Optional Safety Interlock (INT)	Ethernet RJ-45 TCP/IP, RS422/485, USB Optional GPIB Interface Open=STBY/Short=RFON	7" LCD IEEE rear panel BNC-F rear panel

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com
Specifications subject to change without notice.
Specifications and drawings may vary with selected options.


HD35232
SOLID STATE HIGH POWER AMPLIFIER

AVAILABLE SPECIAL OPTIONS

Parameter	Specification	Notes
Option FRS: Forward RF Sample	-50dB, Type K-Female	Front or rear panel
Option RRS: Reflected RF Sample	-40dB, Type K-Female	Front or rear panel
Option GPIB: GPIB remote control	GPIB IEEE-488 Remote capability	
Included CPM: Calibrated Power Monitoring (With purchase of Option DMC)	Offset correction entry for +/- 0.2dB accuracy	15-points standard[4]

4 Consult with factory if additional points would be required.

OUTLINE DRAWING
SHOWN WITH LCD DIGITAL CONTROLLER

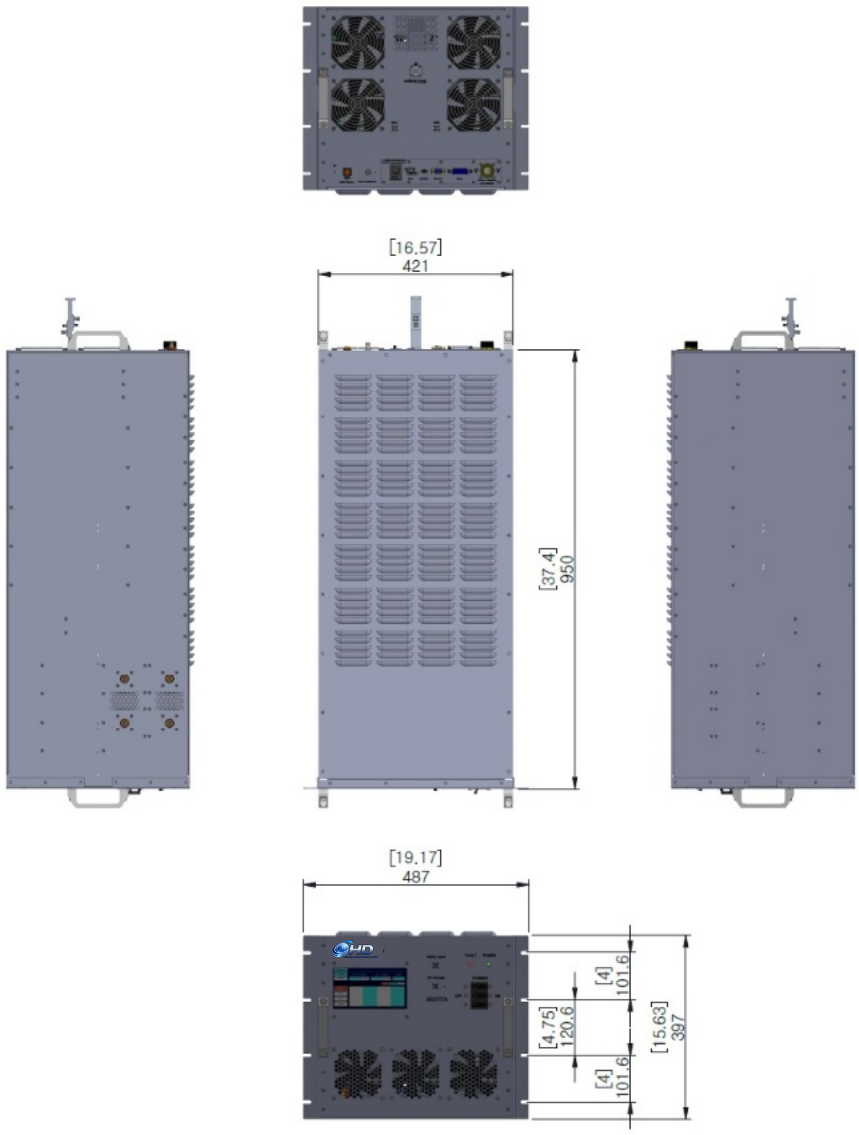

338 Jericho Tpk, Unit 387 Syosset, NY 11791 Phone: 631-588-3877
www.rfamplifiers.com sales@hdcom.com www.rfcomp.com

Specifications subject to change without notice.
Specifications and drawings may vary with selected options.